# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

#### Model identifier: 115999

### Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	WIRE		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers


#### **Product parameters**

Parameter		Value	Parameter	Value		
General product parameters:						
0,	nption in on- 00 h), rounded st integer	9	Energy efficiency class	В		
dicating if it refe a sphere (360°)	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	1 550 in Wide cone (120°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	6 500		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	9,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
(P <sub>net</sub> ) for CLS, e	andby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	1	Spectral power dis-	See image		
sions without	Width	15	tribution in the	in last page		
separate con- trol gear, light-	Depth	550	range 250 nm to 800 nm, at full-load			


ing control parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	lf yes, equivalent power (W)	-			
		Chromaticity coordi- nates (x and y)	0,313 0,329			
Parameters for directional light sources:						
Peak luminous intensity (cd)	493	Beam angle in de- grees, or the range of beam angles that can be set	120			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	82	Survival factor	0,90			
the lumen maintenance factor	0,70					
(a)						

(a)<sub>'-'</sub> : not applicable;

(b)'-' : not applicable;

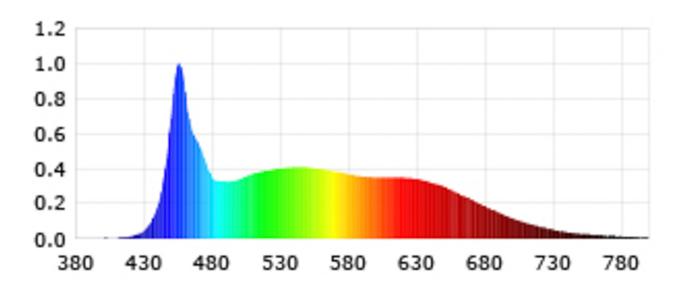

Model placed on the Union market from 18/01/2023



**Supplier:** ISOLED FIAI Handels GmbH (Manufacturer)

**Customer care service:** 

Name: Vertrieb

Email: office@isoled.at

Address: Egerbach 48 6334 Schwoich Austria https://eprel.ec.europa.eu/qr/14 64595

Website: www.isoled.at

Website: https://isoled.shop

Phone: +43 5372 219999

