

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** NIVISS sp. J. Leszek Łosin

**Supplier's address:** General contact, ul. Rdestowa 53D, 81-577 Gdynia Gdynia Pomorskie, PL

**Model identifier:** ORDERING CODE / ARTICLE CODE SP-BPL-MODUL-ALU-TX-5.5W-V2

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	inny		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	D
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	670 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	4,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		


parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,377 0,380	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	2	Survival factor	0,90	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

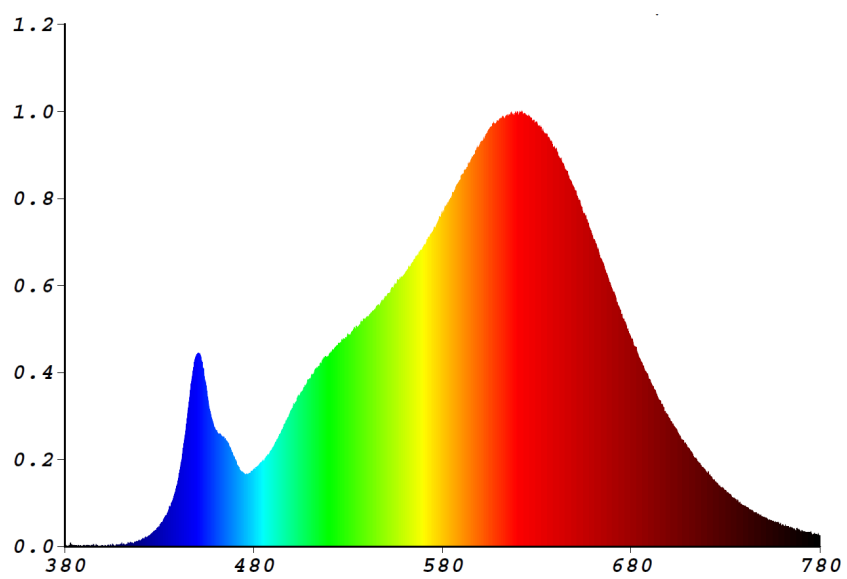

Model placed on the Union market from 10/01/2024



**EPREL registration number:** 1892324

<https://eprel.ec.europa.eu/qr/1892324>

**Supplier:** NIVISS Leszek Łosin Sp.J. (Manufacturer)

**Website:** [www.niviss.com](http://www.niviss.com)

**Customer care service:**

**Name:** General contact

**Website:** [www.niviss.com](http://www.niviss.com)

**Email:** [info@niviss.com](mailto:info@niviss.com)

**Phone:** +48 58 781 33 99

**Address:**

ul. Rdestowa 53D  
81-577 Gdynia  
Poland