

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L147247037

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	45		
	Depth	45		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,467 0,422	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,70	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample : 5-3
Specification : L147247037 5-3
Sample No. : L147247037 5-3
Manufacturer : SPL


Date : 2017-12-06 15:10:56
Sam. Status : AC Stable
Instrument : HaasSuite(EVERFINE)
Test by : sheena
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 52001 (79%)
T : 43 ms
Sensitivity : High

Spectrum

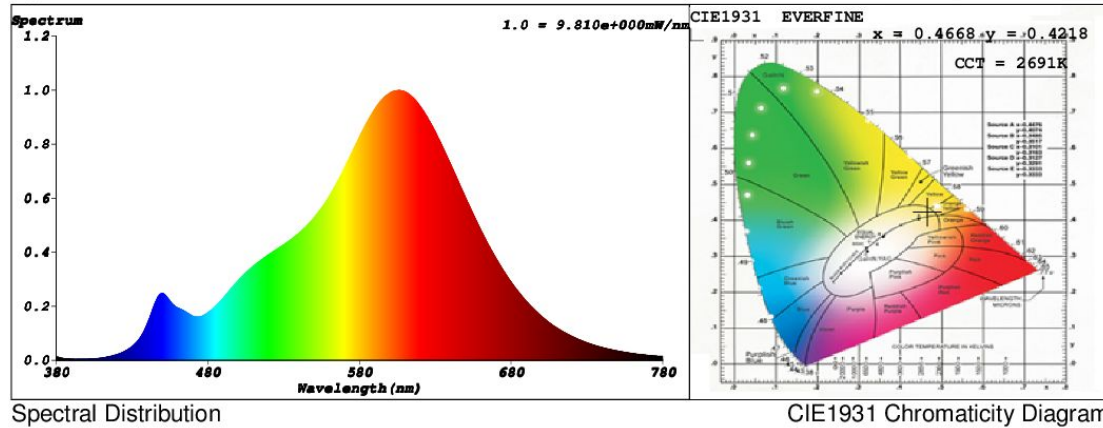

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4668$ $y = 0.4218$ / $u' = 0.2620$ $v' = 0.5326$ ($duv=3.49e-03$)

CCT= 2691K Prcp WL: $L_d=583.2nm$ Purity=66.7%

Peak WL: $L_p=606nm$ FWHM: $=113.2nm$ Ratio: R=24.9% G=72.8% B=2.3%

Render Index: $R_a = 81.8$

R1 =80 R2 =91 R3 =95 R4 =80 R5 =80 R6 =91 R7 =82

R8 =55 R9 =3 R10=81 R11=80 R12=77 R13=82 R14=98 R15=71

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 446.27 lm Eff. : 90.39 lm/W $Fe = 1.3581 W$

Electrical parameters

V = 230.1 V I = 0.02559 A P = 4.937 W PF = 0.8384

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 559271

<https://eprel.ec.europa.eu/qr/559271>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands