

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L149147037

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	5,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	105	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,468 0,422
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	2	Survival factor	0,70
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,80	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a): not applicable;

(b): not applicable;

## SPL Spectrum Test Report

Sample : 5-3  
 Specification : L149147037 5-3  
 Sample No. : L149147037 5-3  
 Manufacturer : SPL


Date : 2017-12-06 09:34:54  
 Sam. Status : AC Stable  
 Instrument : HaasSuite(EVERFINE)  
 Test by : sheena  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 52090 (79%)  
 T : 43 ms  
 Sensitivity : High

### Spectrum

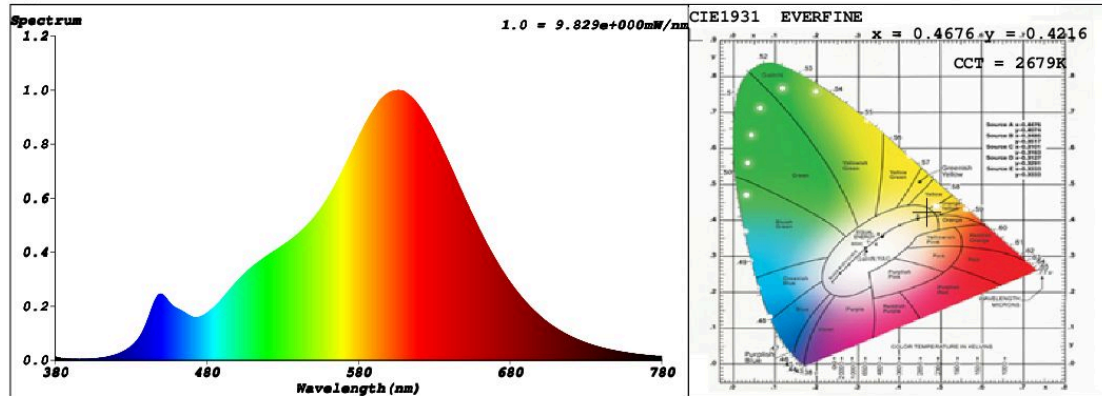

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4676$   $y = 0.4216$  /  $u' = 0.2625$   $v' = 0.5326$  ( $duv=3.36e-03$ )

CCT= 2679K Prcp WL:  $L_d=583.3nm$  Purity=66.9%

Peak WL:  $L_p=606nm$  FWHM:  $=112.4nm$  Ratio:R=25.0% G=72.7% B=2.2%

Render Index:  $R_a = 81.7$

R1 =80 R2 =91 R3 =95 R4 =80 R5 =80 R6 =91 R7 =81

R8 =55 R9 =2 R10=81 R11=80 R12=77 R13=82 R14=98 R15=71

LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 445.26 lm Eff. : 90.24 lm/W  $F_e = 1.3553 W$


### Electrical parameters

V = 230.1 V I = 0.02572 A P = 4.934 W PF = 0.8340

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 559272

<https://eprel.ec.europa.eu/qr/559272>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands