

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L226040630

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	550 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,442 0,407	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	0,90	
the lumen maintenance factor	0,93			

(a) : not applicable;

(b) : not applicable;

SPL Spectrum Test Report

Sample :
Specification :
Sample No. : L226040630-2
Manufacturer :


Date : 2018-03-20 13:29:17
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Ralf
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 51113 (78%)
T : 35 ms
Sensitivity : High

Spectrum

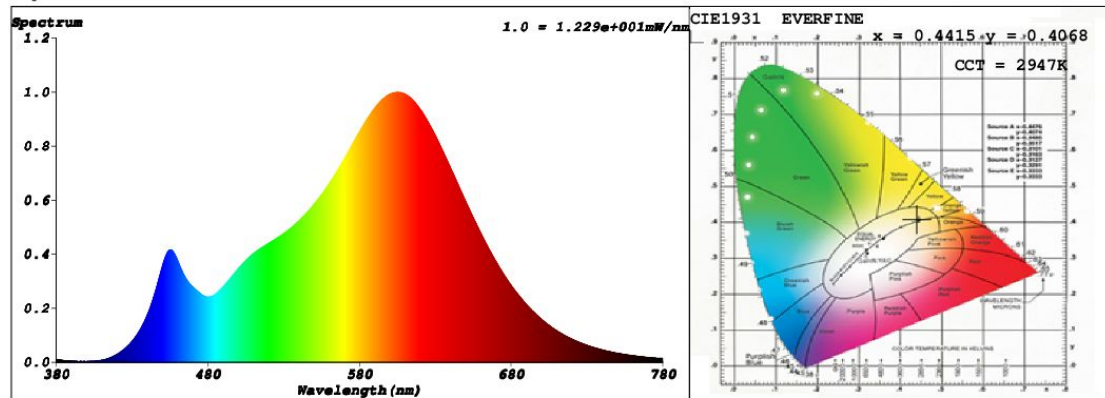

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4415$ $y = 0.4068$ / $u' = 0.2523$ $v' = 0.5231$ ($duv=4.69e-04$)

CCT= 2947K Prcp WL: $L_d=582.9nm$ Purity=54.6%

Peak WL: $L_p=606nm$ FWHM: $=122.9nm$ Ratio: R=23.5% G=73.7% B=2.9%

Render Index: $R_a = 83.7$

$R_1=83$ $R_2=93$ $R_3=94$ $R_4=81$ $R_5=83$ $R_6=93$ $R_7=82$

$R_8=60$ $R_9=11$ $R_{10}=85$ $R_{11}=81$ $R_{12}=78$ $R_{13}=85$ $R_{14}=97$ $R_{15}=75$

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 591.99 lm Eff. : 0.00 lm/W $F_e = 1.8227$ W


Electrical parameters

V = 12.13 V I = 0 A P = 0 W PF = 0

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 12/03/2021



EPREL registration number: 564222

<https://eprel.ec.europa.eu/qr/564222>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands