

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023830308

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,482 0,413	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	47	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification :
Sample No. : LG023830308-2
Manufacturer : SPL


Date : 2018-03-12 11:36:17
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Ralf
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 48570 (74%)
T : 65 ms
Sensitivity : High

Spectrum

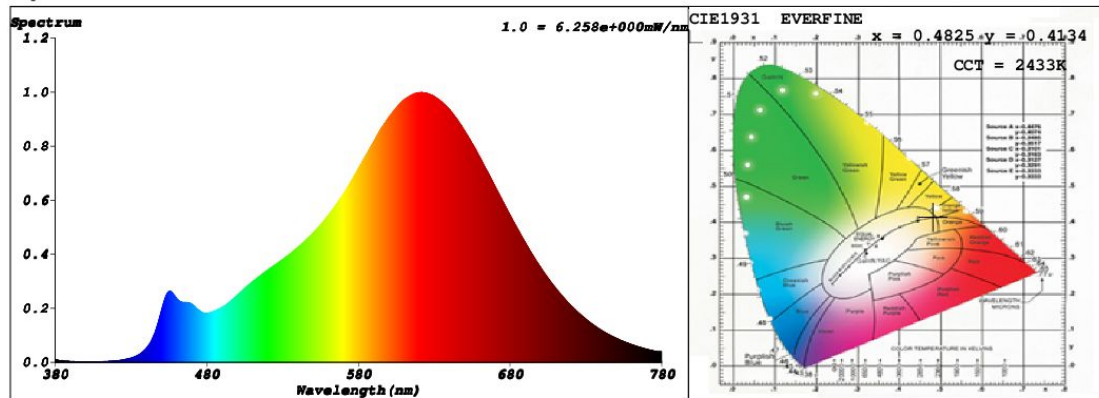

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4825$ $y = 0.4134$ / $u' = 0.2759$ $v' = 0.5318$ ($duv = -3.07e-04$)

CCT= 2433K Prcp WL: $L_d = 585.8\text{nm}$ Purity=68.9%

Peak WL: $L_p = 622\text{nm}$ FWHM: $=131.0\text{nm}$ Ratio: R=28.6% G=69.1% B=2.3%

Render Index: $R_a = 90.0$

R1 =90 R2 =98 R3 =95 R4 =88 R5 =91 R6 =97 R7 =87

R8 =73 R9 =47 R10=94 R11=90 R12=86 R13=92 R14=98 R15=85

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 265.62 lm Eff. : 74.79 lm/W $F_e = 964.68\text{ mW}$


Electrical parameters

V = 230.2 V I = 0.01985 A P = 3.551 W PF = 0.7774

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 25/03/2021



EPREL registration number: 599029

<https://eprel.ec.europa.eu/qr/599029>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands