

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L411981027

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	S19		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	850 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,462 0,407	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	0,90	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

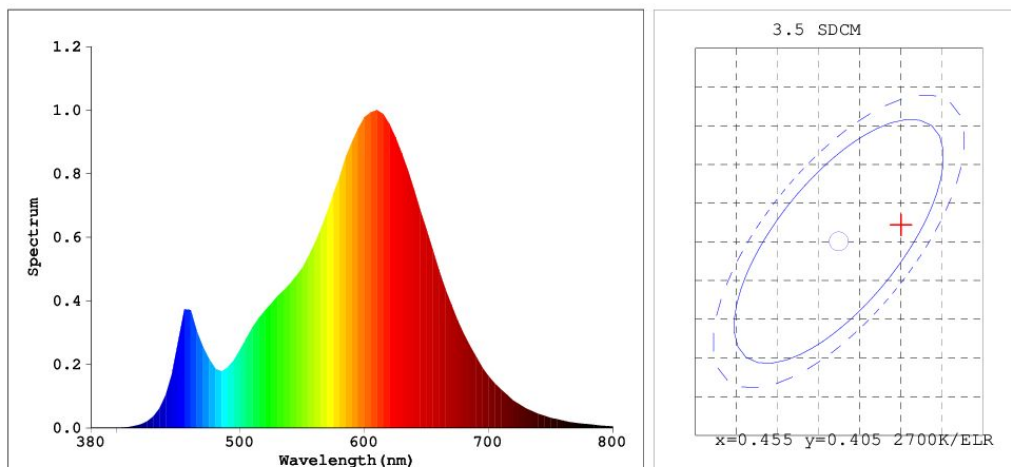

Color Parameters:

Chromaticity Coordinate: $x=0.4615$ $y=0.4067$ Chromaticity Coordinate: $u'=0.2653$ $v'=0.5261$ ($duv=-1.57e-03$)

Tc=2647K Dominant WL:Ld=585.0nm Purity=60.6% Centroid WL:597.0nm

Ratio:R=27.8% G=70.0% B=2.2% Peak WL:Lp=610.0nm HWL:110.4nm

Render Index:Ra=83.1

R1 =83 R2 =94 R3 =93 R4 =80 R5 =83 R6 =94 R7 =80

R8 =57 R9 =11 R10=87 R11=80 R12=78 R13=86 R14=97 R15=75

Photo Parameters:

Flux: 821.13 lm Fe: 2.5695 W Efficacy:116.8 lm/W

WHITE:ANSI_2700K

Electrical Parameters:

Luminaire: U=230.9V I=0.06171A P=7.029W PF=0.4933

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=7140 (R=2)

% =0.043%

Ip=23180 (G=5, D=64)

PMT: 28.8 centigrade [150.0]

Product Type:98815 LEDnear S19-7W 230V-2700K Manufacturer:LUMARTEC

Number:4

Test Department:LUMARTEC

Temperature:25.3 deg

Humidity:65.0%


Test Operator:DAMIN

Test Date:2021-05-13 10:08:22

Software:V3.00.133

Instrument:PMS-80_V1 (SN:G107113CD1321125)

Model placed on the Union market from 25/02/2021



EPREL registration number: 614376

<https://eprel.ec.europa.eu/qr/614376>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands