

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LB276081030

## Type of light source:

|                                                     |     |                                 |      |
|-----------------------------------------------------|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E27 |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | No  | Dimmable:                       | No   |

## Product parameters

| Parameter                                                                                                                                             | Value                | Parameter                                                                                                                                                  | Value                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>General product parameters:</b>                                                                                                                    |                      |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 10                   | Energy efficiency class                                                                                                                                    | G                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 810 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 10,0                 | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, lighting control                                                                                      | Height               | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                |                                                                                                                                                            |                        |

|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,434<br>0,396 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 8    | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,93 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,50 | Colour consistency in McAdam ellipses | 5              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 1,0  | Stroboscopic effect metric (SVM)      | 0,9            |  |

(a) '-': not applicable;

(b) '-': not applicable;

## SPL Spectrum Test Report

Sample :  
Specification : LB276081030  
Sample No. : LB276081030 01  
Manufacturer :


Date : 2019-08-23 15:00:00  
Sam. Status :  
Instrument : HaasSuite(EVERFINE)  
Test by : Schiefer  
Assessor : damin

### Test Condition

Temperature : 25.3Deg  
WL Range : 380nm-780nm  
Test Mode : Fast Test

RH : 65.0%  
IP : 46577 (71%)  
T : 24 ms  
Sensitivity : High

### Spectrum

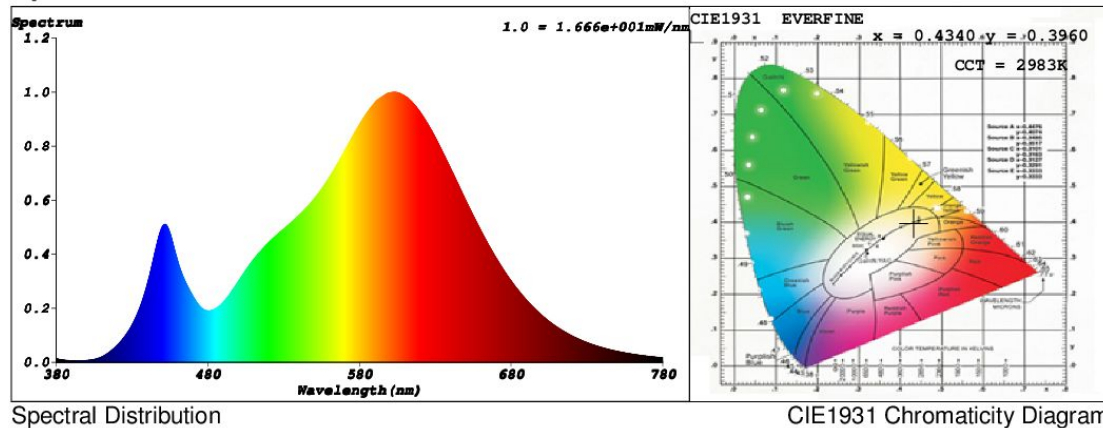

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4340$   $y = 0.3960$  /  $u' = 0.2522$   $v' = 0.5177$  ( $duv = -2.85e-03$ )

CCT= 2983K Prcp WL: Ld=584.0nm Purity=49.1%

Peak WL: Lp=603nm FWHM: =127.7nm Ratio:R=23.0% G=74.4% B=2.6%

Render Index: Ra = 82.2

R1 =81 R2 =91 R3 =96 R4 =80 R5 =81 R6 =89 R7 =82  
R8 =59 R9 =8 R10=79 R11=78 R12=74 R13=83 R14=98 R15=74  
LEVEL:OUT WHITE:ANSI\_3000K

### Photometric & Radiometric Parameters

Flux = 813.59 lm Eff. : 85.60 lm/W Fe = 2.5427 W


### Electrical parameters

V = 229.8 V I = 0.07799 A P = 9.505 W PF = 0.5302

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)

Model placed on the Union market from 01/04/2021



**EPREL registration number:** 614883

<https://eprel.ec.europa.eu/qr/614883>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35  
4871EP Etten-Leur  
Netherlands