Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: LEDVANCE | |
|--|--|
|--|--|

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC33490


| Tvi | рe | of | lig | ht | SO | urce | : |
|-------|----|----|-----|----|----|------|---|
| . , , | | • | о | | - | | • |

| No. | | | | | |
|---|-------------------------------|---------------------------------|------|--|--|
| Product parameters | | | | | |
| Anti-glare shield: | No | Dimmable: | No | | |
| High luminance light source: | No | | | | |
| Colour-tuneable light source: | No | Envelope: | - | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No | | |
| Light source cap-type (or other electric interface) | Constant cur- rent: 800 mA | | | | |
| Lighting technology used: | LED | Non-directional or directional: | NDLS | | |

| Product parameters | | | | | |
|--|----------------|---------------------------|--|--------------|--|
| Parameter | | Value | Parameter | Value | |
| General product parameters: | | | | | |
| Energy consur mode (kWh/10 up to the neare | 00 h), rounded | 16 | Energy efficiency class | D | |
| Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | | 2 700 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 | |
| On-mode power (P _{on}), expressed in W | | 16,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | |
| Outer dimen- | Height | 1 103 | Spectral power dis- | See image | |
| sions without | Width | 9 | tribution in the | in last page | |
| separate con- trol gear, light- ing control | Depth | 1 | range 250 nm to 800 nm, at full-load | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|--|------|------------------------------|-------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordi- | 0,382 | | |
| | | nates (x and y) | 0,380 | | |
| Parameters for LED and OLED light sources: | | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,90 | | |
| the lumen maintenance factor | 0,96 | | | | |

(a)'-': not applicable; (b)'-': not applicable;

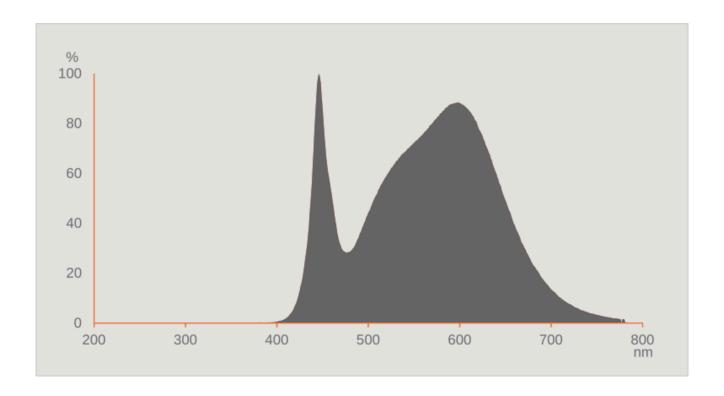

Model placed on the Union market from 09/09/2021



EPREL registration number: 617425 https://eprel.ec.europa.eu/qr/617425

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

Customer care service:

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany