

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L276099925-1

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	430 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	4,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	106	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,489 0,428
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	-5	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;

## SPL Spectrum Test Report

Sample :  
 Specification : L276099925-1  
 Sample No. : 3  
 Manufacturer :


Date : 2021-08-19 15:39:53  
 Sam. Status :  
 Instrument : HaasSuite(EVERFINE)  
 Test by : Renee  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 48256 (74%)  
 T : 43 ms  
 Sensitivity : High

### Spectrum

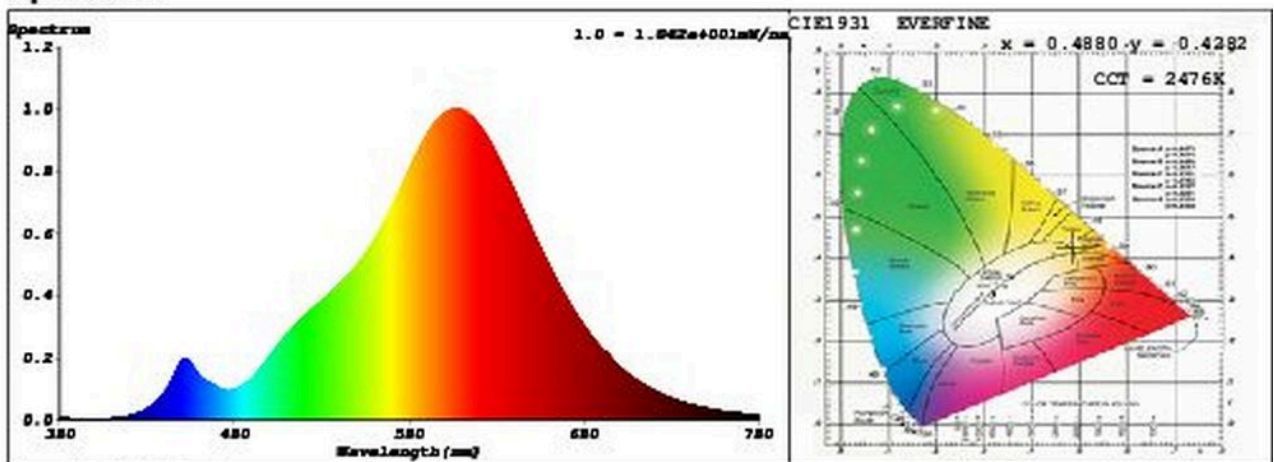

Spectral Distribution

CIE 1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4880$   $y = 0.4282$  /  $u' = 0.2725$   $v' = 0.5381$  ( $duv=4.46e-03$ )  
 CCT= 2476K Prcp WL:  $L_d=584.1nm$  Purity=75.0%  
 Peak WL:  $L_p=608nm$  FWHM: =109.6nm Ratio:R=26.4% G=72.1% B=1.5%

Render Index:  $R_a = 78.9$

R1 =76 R2 =88 R3 =98 R4 =76 R5 =75 R6 =86 R7 =81  
 R8 =51 R9 =5 R10=73 R11=74 R12=66 R13=78 R14=99 R15=67  
 LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 450.35 lm Eff. : 164.70 lm/W  $F_e = 1.3704$  W


### Electrical parameters

V = 229.8 V I = 0.02269 A P = 2.734 W PF = 0.5245

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)

Model placed on the Union market from 23/03/2021



**EPREL registration number:** 619774

<https://eprel.ec.europa.eu/qr/619774>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands