## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: LEDVAI | <b>NCE</b> |
|---------------------------------------|------------|
|---------------------------------------|------------|

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC33331

On-mode power (Pon), ex-

(P<sub>net</sub>) for CLS, expressed in W

and rounded to the second dec-

Height

Width

Depth

power

pressed in W

Outer dimen-

sions without

separate con-

trol gear, light-

control

imal

ing

Networked standby

| Type of light source:  |                           |  |       |
|--|---------------------------|--|-------|
| Lighting technology used:  | LED                       | Non-directional or directional:  | NDLS  |
| Light source cap-type  | Constant cur-             |  |       |
| (or other electric interface)  | rent: 750 mA              |  |       |
| Mains or non-mains:  | NMLS                      | Connected light source (CLS):  | No    |
| Colour-tuneable light source:  | No                        | Envelope:  | -     |
| High luminance light source:   | No                        |  |       |
| Anti-glare shield:   | No                        | Dimmable:  | No    |
|  | Product para              | meters   |       |
| Parameter  | Value                     | Parameter  | Value |
|  | General product p         | parameters:  |       |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   | 33                        | Energy efficiency class  | Е     |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 4 100 in<br>Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |

33,0

595

595

35

Standby power (P<sub>sb</sub>),

expressed in W and rounded to the sec-

Colour rendering in-

dex, rounded to the

nearest integer, or the range of CRI-val-

ues that can be set

Spectral power dis-

range 250 nm to 800

nm, at full-load

in

the

ond decimal

tribution

0,00


80

See image

in last page

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |      |                              |       |  |  |
|--|------|------------------------------|-------|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -    | If yes, equivalent power (W) | -     |  |  |
|  |      | Chromaticity coordi-         | 0,382 |  |  |
|  |      | nates (x and y)              | 0,380 |  |  |
| Parameters for LED and OLED light sources:                                 |      |                              |       |  |  |
| R9 colour rendering index value  | 0    | Survival factor              | 0,90  |  |  |
| the lumen maintenance factor   | 0,96 |                              |       |  |  |

(a)'-': not applicable; (b)'-': not applicable;

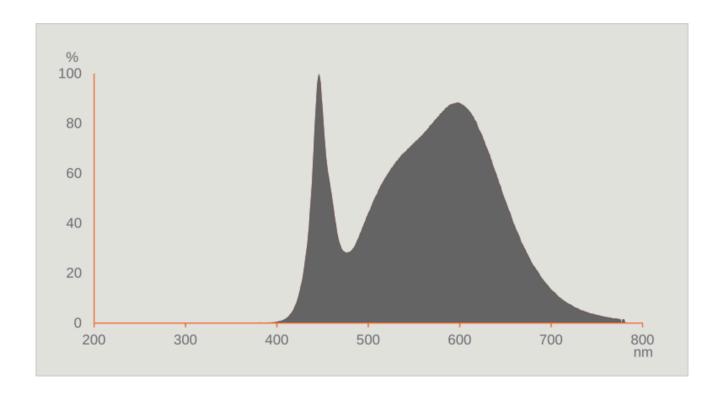

Model placed on the Union market from 09/09/2021



EPREL registration number: 628654 https://eprel.ec.europa.eu/qr/628654

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

**Customer care service:** 

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany