

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L149151827

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	35		
	Depth	35		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,460 0,411	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-06-02 15:54:02
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Schiefer
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	45833 (70%)
Test Mode	:	Fast Test	T	:	40 ms
			Sensitivity	:	High

Spectrum

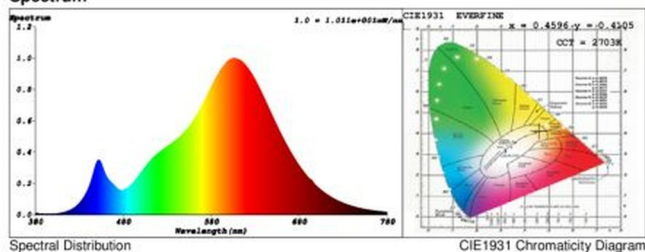

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4596$ $y = 0.4105$ / $u' = 0.2624$ $v' = 0.5273$ ($duv = -1.42e-05$)

CCT= 2703K Prcp WL: Ld=584.2nm Purity=61.2%

Peak WL: Lp=607nm FWHM: =116.5nm Ratio:R=25.2% G=72.6% B=2.2%

Render Index: Ra = 82.9

R1 =82 R2 =92 R3 =96 R4 =81 R5 =82 R6 =91 R7 =82
 R8 =58 R9 =9 R10=82 R11=81 R12=78 R13=84 R14=98 R15=73
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 460.00 lm Eff. : 84.65 lm/W $F_0 = 1.4400$ W

Electrical parameters

V = 229.9 V I = 0.03019 A P = 5.434 W PF = 0.7829

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 29/01/2021



EPREL registration number: 654271

<https://eprel.ec.europa.eu/qr/654271>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands