

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L277251827

## Type of light source:

|                                                     |     |                                 |                            |
|-----------------------------------------------------|-----|---------------------------------|----------------------------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS                       |
| Light source cap-type (or other electric interface) | E27 |                                 |                            |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No  | Envelope:                       | -                          |
| High luminance light source:                        | No  |                                 |                            |
| Anti-glare shield:                                  | No  | Dimmable:                       | Only with specific dimmers |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

### General product parameters:

|                                                                                                                                                       |        |                      |                                                                                                                                                            |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         |        | 5                    | Energy efficiency class                                                                                                                                    | F                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |        | 470 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     |        | 5,0                  | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                |        | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 82                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height | 75                   | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width  | 45                   |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth  | 45                   |                                                                                                                                                            |                        |

|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,460<br>0,411 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 9    | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,93 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90 | Colour consistency in McAdam ellipses | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 1,0  | Stroboscopic effect metric (SVM)      | 0,4            |  |

(a) '-': not applicable;

(b) '-': not applicable;


# SPL Spectrum Test Report

|               |   |             |   |                     |
|---------------|---|-------------|---|---------------------|
| Sample        | : | Date        | : | 2021-06-02 15:54:02 |
| Specification | : | Sam. Status | : |                     |
| Sample No.    | : | Instrument  | : | HaasSuite(EVERFINE) |
| Manufacturer  | : | Test by     | : | Schiefer            |
|               |   | Assessor    | : | damin               |

## Test Condition

|             |   |             |             |   |             |
|-------------|---|-------------|-------------|---|-------------|
| Temperature | : | 25.3Deg     | RH          | : | 65.0%       |
| WL Range    | : | 390nm-780nm | IP          | : | 45833 (70%) |
| Test Mode   | : | Fast Test   | T           | : | 40 ms       |
|             |   |             | Sensitivity | : | High        |

## Spectrum

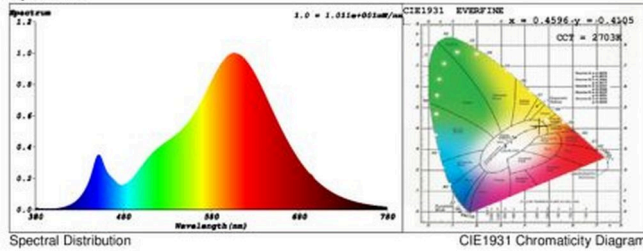

## Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4596$   $y = 0.4105$  /  $u' = 0.2624$   $v' = 0.5273$  ( $duv = -1.42e-05$ )  
 CCT= 2703K Prcp WL: Ld=584.2nm Purity=61.2%  
 Peak WL: Lp=607nm FWHM: =116.5nm Ratio:R=25.2% G=72.6% B=2.2%

Render Index: Ra = 82.9

R1 =82 R2 =92 R3 =96 R4 =81 R5 =82 R6 =91 R7 =82  
 R8 =58 R9 =9 R10=82 R11=81 R12=78 R13=84 R14=98 R15=73  
 LEVEL:OUT WHITE:ANSI\_2700K

## Photometric & Radiometric Parameters

Flux = 460.00 lm Eff. : 84.65 lm/W  $F_0 = 1.4400$  W


## Electrical parameters

V = 229.9 V I = 0.03019 A P = 5.434 W PF = 0.7829

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 29/01/2021



**EPREL registration number:** 654309

<https://eprel.ec.europa.eu/qr/654309>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands