

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SLV

**Supplier's address:** EPREL-Contact, Daimlerstraße 21-23, 52531 Übach-Palenberg, DE

**Model identifier:** 1005275

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	13	Energy efficiency class	G
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	900 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{\text{on}}$ ), expressed in W	12,5	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate con-	Height	Spectral power distribution in the range	See image in last page
	Width		
	Depth		


trol gear, lighting control parts and non-lighting control parts, if any (millimetre)			250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,460 0,410
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	11 000		Beam angle in degrees, or the range of beam angles that can be set	10
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	51		Survival factor	0,00
the lumen maintenance factor	0,96			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,96		Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0		Stroboscopic effect metric (SVM)	0,4

(a) : not applicable;

(b) : not applicable;

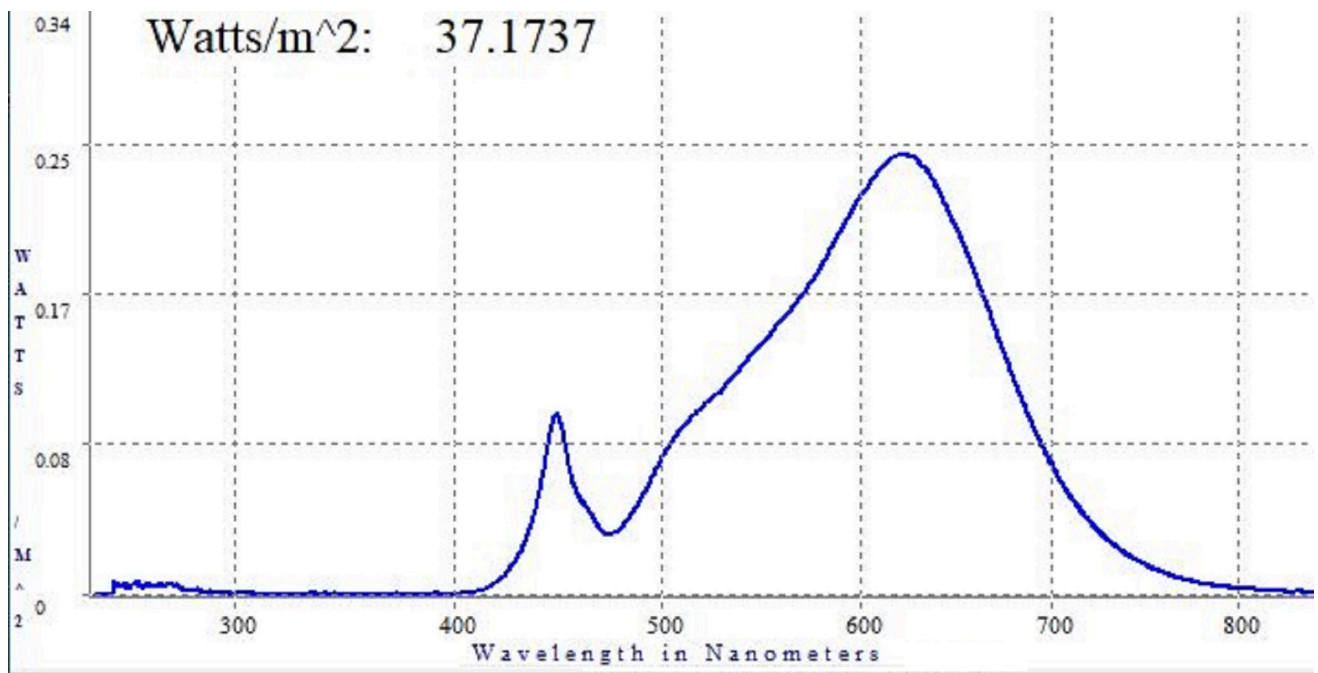

Múnla a cuireadh ar mhargadh an Aontais ón méid seo a leanas 01/10/2021



**Cláruimhir EPREL:** 703334

<https://eprel.ec.europa.eu/qr/703334>

**Soláthróir:** SLV GmbH (Allmhaireoir)

**Suíomh gréasáin:** [www.slv.com](http://www.slv.com)

**Seirbhís cúraim custaiméirí:**

**Ainm:** EPREL-Contact

**Suíomh gréasáin:** [www.slv.com](http://www.slv.com)

**Seoladh Ríomhphoist:** [eprel@slv.de](mailto:eprel@slv.de)

**Guthán:** +49 (0)2451 4833 0

**Seoladh:**

Daimlerstraße 21-23  
52531 Übach-Palenberg  
Germany