Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Duralamp S.p.A.

Supplier's address: Customer Care, Via Pratese, 164 50145 Florence - Italy

Model identifier: LCR120W

Type of light source:


Light source cap-type	G10q	directional:	
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

ParameterValueParameterValueGeneral product parameters:Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer11Energy efficiency classFUseful luminous flux (duse), in- dicating if it refers to the flux in a sphere (3609), in a wide cone (1209) or in a narrow cone (909)1 045 in Wide cone (120°)Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set3 000On-mode power (Pon), ex- pressed in W and rounded to the sec- imal11,0Standby power (Psh), expressed in W and rounded to the nearest integer, or the range of CRI-val- ues that can be set0,00Networked stamby power (Pnet) for CLS, expressed in W and rounded to the sec- imal-Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set80Outer dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image	Product parameters						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer11Energy efficiency classFUseful luminous flux (фuse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)1 045 in Wide cone (120°)Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set3 000On-mode power (Pon), ex- pressed in W11,0Standby power (Psb), expressed in W and rounded to the sec- ond decimal0,00Networked standby power (Pnet) for CLS, expressed in W and rounded to the second decimal-Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set80Outer dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image	Parameter		Value	Parameter	Value		
mode (kWh/1000 h), rounded up to the nearest integerclassUseful luminous flux (фuse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)1 045 in Wide cone (120°)Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set3 000On-mode power (Pon), ex- pressed in W11,0Standby power (Psb), expressed in W0,00Networked standby power (Pnet) for CLS, expressed in W and rounded to the second dec- imal-Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set80Outer dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image	General product parameters:						
dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)cone (120°)temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be setOn-mode power (Pon), ex- pressed in W11,0Standby power (Psb), expressed in W and rounded to the sec- ond decimal0,00Networked standby power (Pnet) for CLS, expressed in W and rounded to the second dec- imal-Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set80Outer dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image in last page	mode (kWh/10	00 h), rounded	11		F		
pressed in Wexpressed in W and rounded to the sec- ond decimalNetworked standby power (Pnet) for CLS, expressed in W and rounded to the second dec- imal-Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set80Outer dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image in last page	dicating if it refe a sphere (360 ^o)	ers to the flux in , in a wide cone		temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K,	3 000		
(Pnet) for CLS, expressed in W and rounded to the second dec- imaldex, rounded to the nearest integer, or the range of CRI-val- ues that can be setOuter dimen- sions without separate con- trol gear, light-Height30Spectral power dis- tribution in the range 250 nm to 800 nm, at full-loadSee image		ver (P _{on}), ex-	11,0	expressed in W and rounded to the sec-	0,00		
sions without separate con- trol gear, light-Width205tributionin the range 250 nm to 800 nm, at full-loadin last page	(P _{net}) for CLS, e and rounded to	expressed in W	-	dex, rounded to the nearest integer, or the range of CRI-val-	80		
separate con- trol gear, light-Depth205range 250 nm to 800 nm, at full-load	sions without separate con-	Height	30	Spectral power dis-	See image		
trol gear, light-		Width	205	range 250 nm to 800	in last page		
ing control		Depth	205				

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi- nates (x and y)	0,430 0,402			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	10	Survival factor	0,90			
the lumen maintenance factor	0,96					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6			
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9			

(a)_{'-'} : not applicable;

(b)'_-' : not applicable;

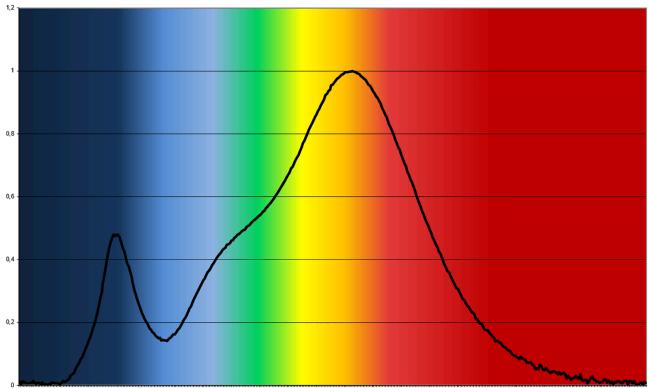

Model placed on the Union market from 01/09/2021



EPREL registration number: 728651

Supplier: DURA LAMP SRL (Importer)

Customer care service:

Name: Customer Care

Email: duralamp@duralamp.it

Address:

Via Pratese, 164 50145 Florence - Italy

https://eprel.ec.europa.eu/qr/728651

Website: www.duralamp.com

Website: http://www.duralamp.it

Phone: +39055894881