

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L279029022

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		4	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		350 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W		4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	135	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	95		
	Depth	95		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,475 0,417	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

电光源测试报告

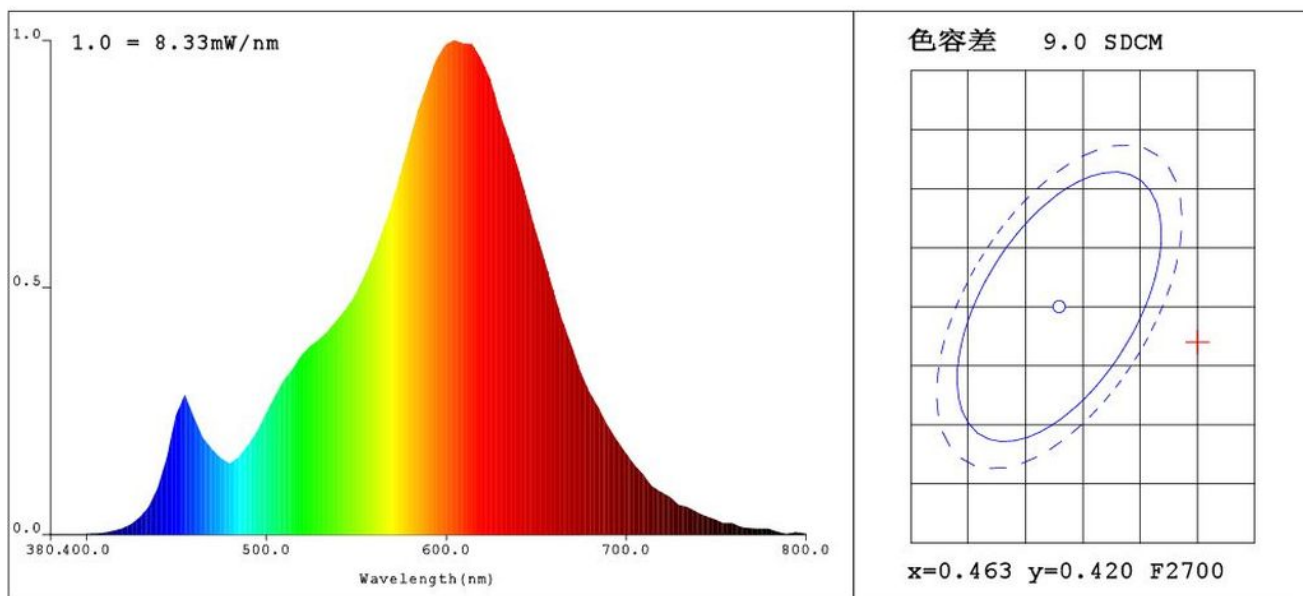

CIE颜色参数:

色品坐标: $x=0.4751$ $y=0.4170$ / $u'=0.2694$ $v'=0.5320$ ($duv=1.25e-03$)
 相关色温: $T_c=2548K$ 主波长: $\lambda_d=584.6nm$ 色纯度: $Purity=67.8\%$
 峰值波长: $\lambda_p=605nm$ 半宽度: $\Delta\lambda_p=107.4nm$ 色比: $R=26.3\%$ $G=71.6\%$ $B=2.0\%$
 平均波长: $\lambda_{av}=599nm$ 色品分类: OUT

显色指数: $R_a=81.7$

R1 =80 R2 =92 R3 =94 R4 =79 R5 =81 R6 =93 R7 =80 R8 =54
 R9 =3 R10=83 R11=80 R12=77 R13=83 R14=97 R15=71

光参数:

光通量: $\Phi=361.83(lm)$ 光效率: $\eta=91.37(lm/W)$ 光辐射功率 $P=1.115(W)$

电参数:

$U=230.5V$ $I=0.01969A$ $P=3.960W$ $PF=0.872$

仪器状态:

扫描范围: 380.0nm-800.0nm
 参考通道: REF=15450


扫描间隔: 5.0nm
 倍增管工作温度: 31.4℃

主通道峰值: $I_p=2980(G=6, D=59)$
 测试模式: 快速测试

产品型号: L279029022
 测试仪器: 远方PMS-80系统
 环境温度: 150.0℃
 测试人员: XR

制造厂商: BOFA
 测试单位: BOFA
 环境湿度: 65.0%
 测试日期: 2021-08-17 09:25

Model placed on the Union market from 31/05/2021



EPREL registration number: 765918

<https://eprel.ec.europa.eu/qr/765918>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands