

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023880822

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		7	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W		6,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	135	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	95		
	Depth	95		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,495 0,418	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	64	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : L022366037
Sample No. : LF023880822-1
Manufacturer :


Date : 2020-07-21 13:22:53
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Schiefer
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 55220 (84%)
T : 42 ms
Sensitivity : High

Spectrum

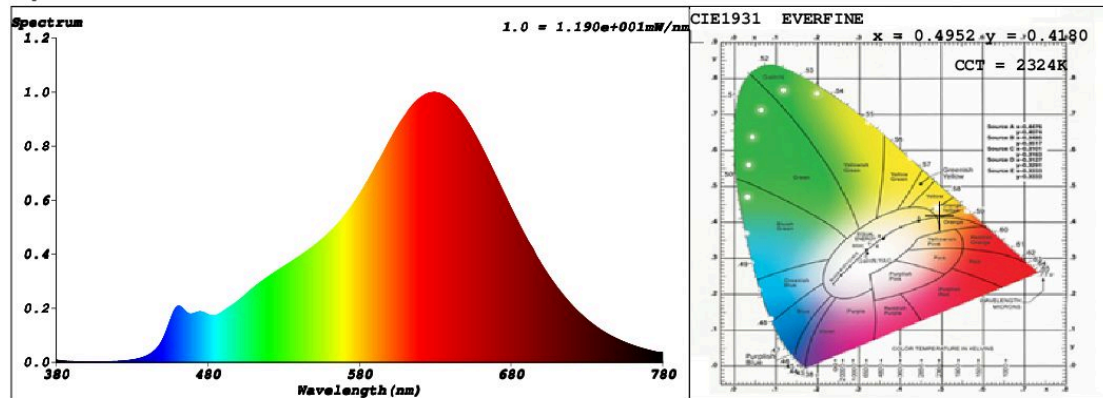

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4952$ $y = 0.4180$ / $u' = 0.2820$ $v' = 0.5355$ ($duv=9.26e-04$)

CCT= 2324K Prcp WL: $L_d=586.1nm$ Purity=74.2%

Peak WL: $L_p=629nm$ FWHM: $=123.0nm$ Ratio: R=30.5% G=67.3% B=2.2%

Render Index: $R_a = 93.6$

R1 =96 R2 =99 R3 =96 R4 =94 R5 =96 R6 =95 R7 =90

R8 =82 R9 =64 R10=99 R11=97 R12=88 R13=98 R14=99 R15=90

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 462.64 lm Eff. : 76.38 lm/W $F_e = 1.7517 W$


Electrical parameters

V = 229.8 V I = 0.03442 A P = 6.057 W PF = 0.7658

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 11/05/2021 to 05/10/2022



EPREL registration number: 766338

<https://eprel.ec.europa.eu/qr/766338>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands