

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023899802

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W		6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	262	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	200		
	Depth	200		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,479 0,411	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	62	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : LF023899802
Sample No. : LF023899802 01
Manufacturer :


Date : 2020-11-05 10:49:34
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Schiefer
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 53548 (82%)
T : 41 ms
Sensitivity : High

Spectrum

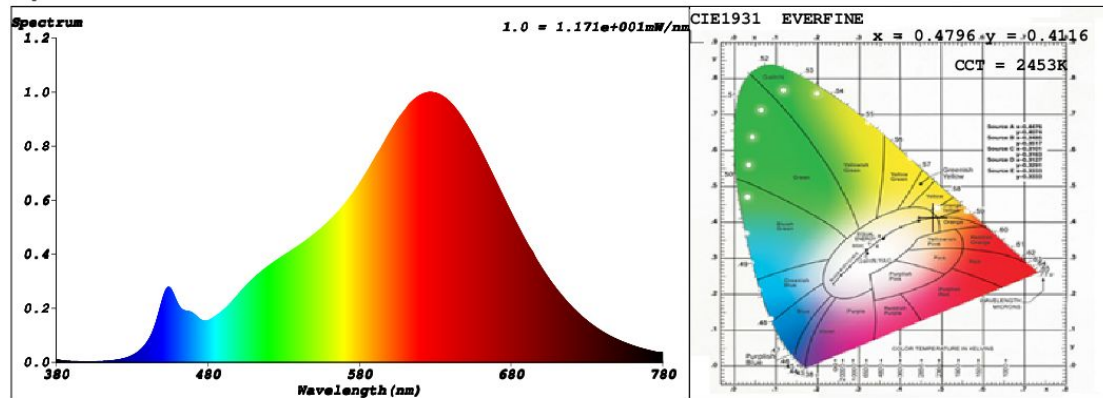

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4796$ $y = 0.4116$ / $u' = 0.2749$ $v' = 0.5307$ ($duv = -8.24e-04$)

CCT= 2453K Prcp WL: Ld=585.8nm Purity=67.5%

Peak WL: Lp=627nm FWHM: =129.5nm Ratio:R=29.0% G=68.8% B=2.2%

Render Index: Ra = 93.9

R1 =95 R2 =99 R3 =98 R4 =95 R5 =96 R6 =97 R7 =90
R8 =81 R9 =62 R10=97 R11=97 R12=89 R13=96 R14=100 R15=90

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 483.05 lm Eff. : 82.38 lm/W Fe = 1.7865 W


Electrical parameters

V = 229.7 V I = 0.02957 A P = 5.864 W PF = 0.8633

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 23/06/2021 to 12/05/2022



EPREL registration number: 768078

<https://eprel.ec.europa.eu/qr/768078>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands