Product Information Sheet

Outer dimen-

sions without

separate con-

trol gear, light-

Height

Width

Depth

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Duralamp S.p.A. Supplier's address: Customer Care, Via Pratese, 164 50145 Florence - Italy Model identifier: DA6012W-D								
					Type of light source:			
					Lighting technology used:	LED	Non-directional or directional:	NDLS
					Light source cap-type	E27		
(or other electric interface)								
Mains or non-mains:	MLS	Connected light source (CLS):	No					
Colour-tuneable light source:	No	Envelope:	-					
High luminance light source:	No							
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers					
Product parameters								
Parameter	Value	Parameter	Value					
General product parameters:								
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	11	Energy efficiency class	F					
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 055 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700					
On-mode power (P _{on}), expressed in W	11,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00					
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80					
Outor dimon Hoight	110	Constant manager alla	C:					

118

60

60

Spectral power dis-

range 250 nm to 800

nm, at full-load

in

the

tribution


See image

in last page

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	75	
		Chromaticity coordi-	0,459	
		nates (x and y)	0,417	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

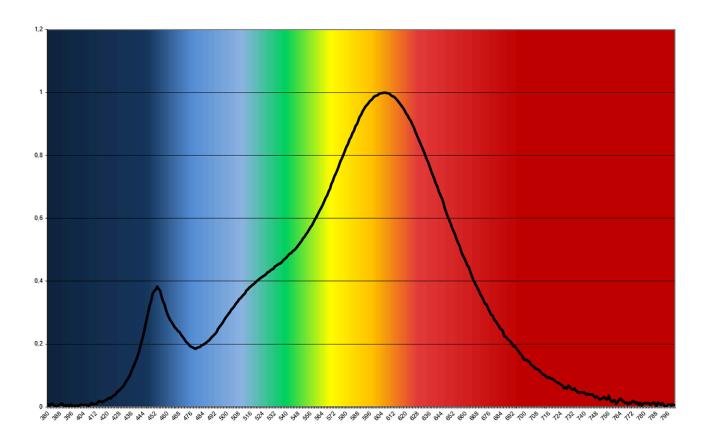

Model placed on the Union market from 01/09/2021



EPREL registration number: 780257 https://eprel.ec.europa.eu/qr/780257

Supplier: DURA LAMP SRL (Importer) Website: www.duralamp.com

Customer care service:

Name: Customer Care Website: http://www.duralamp.it

Email: duralamp@duralamp.it Phone: +39055894881

Address:

Via Pratese, 164 50145 Florence - Italy