

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: CASA BULB

Supplier's address: Produktmanagement, Hermann-Staudinger-Str. 10-16, 63110 Rodgau, DE

Model identifier: YMOCA-BULB-E27

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Standard Edison Screw Cap		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	740 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...6900
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,30
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,30	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		


parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,308 0,314	
Parameters for directional light sources:				
Peak luminous intensity (cd)	120	Beam angle in degrees, or the range of beam angles that can be set	175	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	90	Survival factor	-	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,8	

(a) - : not applicable;

(b) - : not applicable;

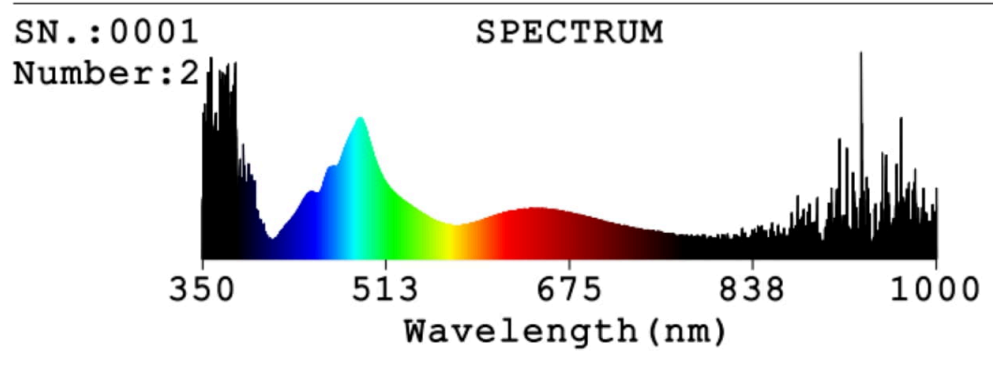

Model placed on the Union market from 01/05/2019



EPREL registration number: 782374

<https://eprel.ec.europa.eu/qr/782374>

Supplier: RP-Technik GmbH (Manufacturer)

Website: <https://www.rp-group.com>

Customer care service:

Name: Produktmanagement

Website: <https://www.rp-group.com/de>

Email: Produktmanagement@rp-group.com

Phone: +49 (6106) 660 28 - 0

Address:

Hermann-Staudinger-Str. 10-16
63110 Rodgau
Germany