

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L642763900

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	300 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...2700
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,468 0,420	
Parameters for directional light sources:				
Peak luminous intensity (cd)	530	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	61	Survival factor	0,90	
the lumen maintenance factor	0,97			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : L642763900
Sample No. : L642763900-43
Manufacturer :


Date : 2021-07-01 09:10:50
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Renee
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 50325 (77%)
T : 57 ms
Sensitivity : High

Spectrum

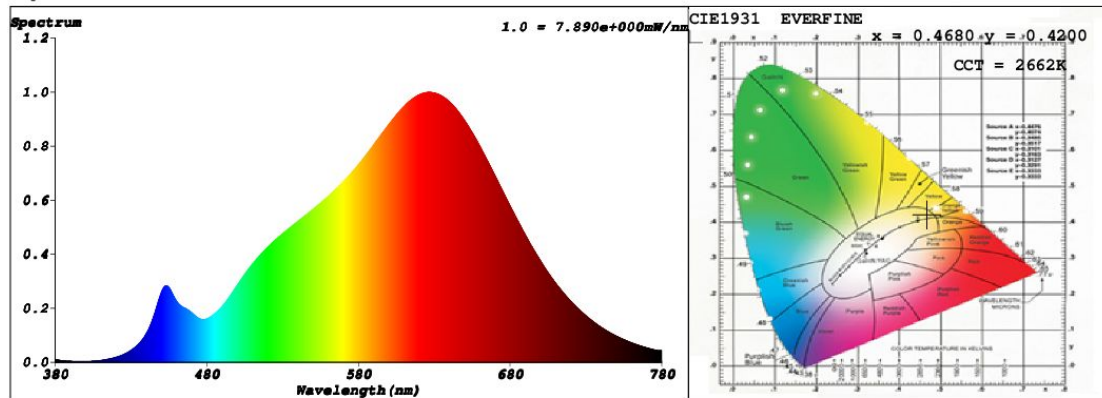

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4680$ $y = 0.4200$ / $u' = 0.2635$ $v' = 0.5321$ ($duv=2.78e-03$)

CCT= 2662K Prcp WL: $L_d=583.5nm$ Purity=66.6%

Peak WL: $L_p=626nm$ FWHM: $=152.3nm$ Ratio: R=26.5% G=71.3% B=2.2%

Render Index: $R_a = 92.6$

R1 =92 R2 =95 R3 =97 R4 =93 R5 =92 R6 =95 R7 =94

R8 =83 R9 =61 R10=88 R11=94 R12=81 R13=93 R14=97 R15=88

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 360.01 lm Eff. : 68.17 lm/W $Fe = 1.2917 W$


Electrical parameters

V = 229.9 V I = 0.02831 A P = 5.281 W PF = 0.8114

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 795134

<https://eprel.ec.europa.eu/qr/795134>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands