## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| sources  |              |                            |  |                                 |  |  |
|--|--------------|----------------------------|--|---------------------------------|--|--|
| Supplier's name or trade mark: FIAI  |              |                            |  |                                 |  |  |
| Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT   |              |                            |  |                                 |  |  |
| Model identifier: 113153   |              |                            |  |                                 |  |  |
| Type of light so   | urce:        |                            |  |                                 |  |  |
| Lighting technology used:  |              | LED                        | Non-directional or directional:  | DLS                             |  |  |
| Light source cap-type  |              | WIRE                       |  |                                 |  |  |
| (or other electri  | c interface) |                            |  |                                 |  |  |
| Mains or non-mains:  |              | NMLS                       | Connected light source (CLS):  | No                              |  |  |
| Colour-tuneable light source:  |              | No                         | Envelope:  | -                               |  |  |
| High luminance light source:   |              | Yes                        |  |                                 |  |  |
| Anti-glare shield:   |              | No                         | Dimmable:  | Only with spe-<br>cific dimmers |  |  |
| Product parameters   |              |                            |  |                                 |  |  |
| Parameter  |              | Value                      | Parameter  | Value                           |  |  |
| General product parameters:  |              |                            |  |                                 |  |  |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |              | 6                          | Energy efficiency class  | E                               |  |  |
| Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |              | 700 in Wide<br>cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500                           |  |  |
| On-mode power (P <sub>on</sub> ), expressed in W   |              | 6,0                        | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00                            |  |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |              | -                          | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 92                              |  |  |
| Outer dimen-   | Height       | 5                          | Spectral power dis-  | See image                       |  |  |
| sions without  | Width        | 11                         | tribution in the   | in last page                    |  |  |
| separate con-<br>trol gear, light-   | Depth        | 5                          | range 250 nm to 800<br>nm, at full-load  |                                 |  |  |

| ing control parts and non- lighting con- trol parts, if any (millime- tre) |      |  |       |  |  |  |
|--|------|--|-------|--|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -    | If yes, equivalent power (W)                                       | -     |  |  |  |
|  |      | Chromaticity coordi-   | 0,313 |  |  |  |
|  |      | nates (x and y)  | 0,329 |  |  |  |
| Parameters for directional light sources:                                  |      |  |       |  |  |  |
| Peak luminous intensity (cd)   | 700  | Beam angle in degrees, or the range of beam angles that can be set | 120   |  |  |  |
| Parameters for LED and OLED light sources:                                 |      |  |       |  |  |  |
| R9 colour rendering index value  | 93   | Survival factor  | 0,90  |  |  |  |
| the lumen maintenance factor   | 0,70 |  |       |  |  |  |

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

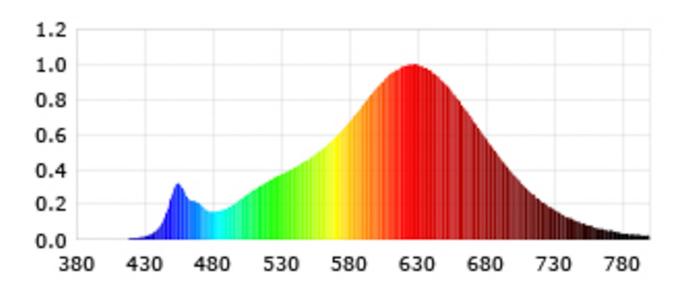

Model placed on the Union market from 25/03/2017



**EPREL registration number:** 805416 https://eprel.ec.europa.eu/qr/805416

Supplier: ISOLED FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website: https://isoled.shop

Email: office@isoled.at Phone: +43 5372 219999

Address: Egerbach 48 6334 Schwoich

Austria