

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022364627

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	180 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 800
On-mode power (P_{on}), expressed in W	2,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,462 0,414	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,75	
the lumen maintenance factor	0,85			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : L022364627
Sample No. : L022364627 1
Manufacturer :


Date : 2020-10-27 15:04:10
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Schiefer
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 48249 (74%)
T : 101 ms
Sensitivity : High

Spectrum

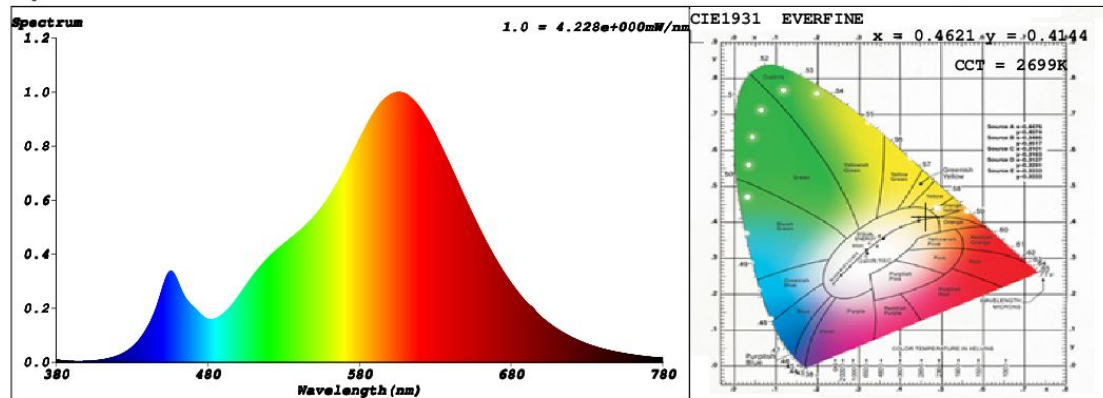

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4621$ $y = 0.4144$ / $u' = 0.2622$ $v' = 0.5291$ ($duv=1.21e-03$)

CCT= 2699K Prcp WL: $L_d=583.8nm$ Purity=63.1%

Peak WL: $L_p=606nm$ FWHM: $=115.7nm$ Ratio: R=24.9% G=73.0% B=2.1%

Render Index: $R_a = 81.3$

$R_1=80$ $R_2=91$ $R_3=96$ $R_4=78$ $R_5=80$ $R_6=90$ $R_7=81$

$R_8=55$ $R_9=3$ $R_{10}=79$ $R_{11}=77$ $R_{12}=72$ $R_{13}=82$ $R_{14}=99$ $R_{15}=71$

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 192.50 lm Eff. : 0.00 lm/W $F_e = 590.17 mW$


Electrical parameters

$V = 0 V$ $I = 0 A$ $P = 0 W$ PF = 0

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021 to 19/10/2022



EPREL registration number: 831172

<https://eprel.ec.europa.eu/qr/831172>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands