

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022536927

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU5.3		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	460 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	98
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,459 0,459	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 000	Beam angle in degrees, or the range of beam angles that can be set	36	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	93	Survival factor	0,90	
the lumen maintenance factor	0,97			

(a) '-': not applicable;

(b) '-': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-07-19 15:06:27
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Renee
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	390nm-780nm	IP	:	55267 (84%)
Test Mode	:	Fast Test	T	:	42 ms
			Sensitivity	:	High

Spectrum

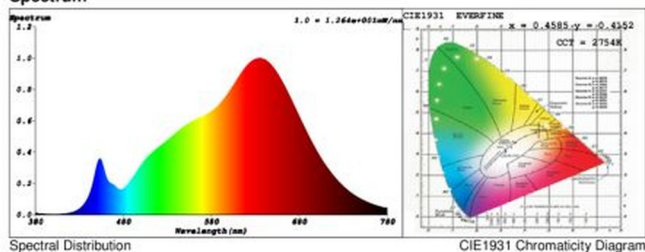

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4585$ $y = 0.4152$ / $u' = 0.2596$ $v' = 0.5289$ ($duv = 1.81e-03$)

CCT = 2754K Prcp WL: Ld=583.4nm Purity=62.3%

Peak WL: Lp=635nm FWHM: =155.8nm Ratio:R=26.5% G=71.1% B=2.5%

Render Index: Ra = 97.4

R1 = 99 R2 = 98 R3 = 95 R4 = 99 R5 = 98 R6 = 97 R7 = 98
 R8 = 95 R9 = 86 R10 = 93 R11 = 98 R12 = 85 R13 = 98 R14 = 96 R15 = 96
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 554.29 lm Eff. : 0.00 lm/W Fo = 2.0794 W

Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831181

<https://eprel.ec.europa.eu/qr/831181>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands