

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022625027

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	W2.1x9.5D		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	2,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,467 0,416	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	12	Survival factor	0,90	
the lumen maintenance factor	0,93			

(a) : not applicable;

(b) : not applicable;

SPL Spectrum Test Report

Sample :
 Specification :
 Sample No. : L022625027-1
 Manufacturer :


Date : 2017-12-13 09:24:15
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by :
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 51258 (78%)
 T : 69 ms
 Sensitivity : High

Spectrum

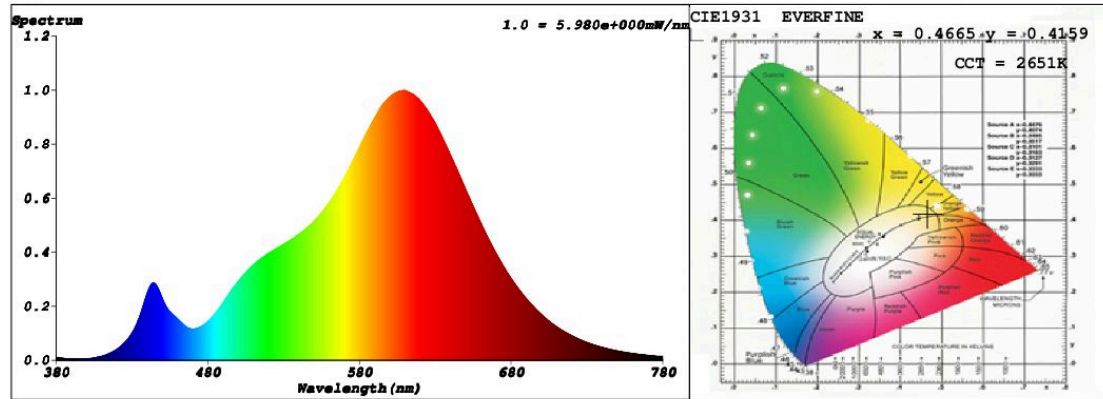

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4665$ $y = 0.4159$ / $u' = 0.2644$ $v' = 0.5303$ ($duv=1.42e-03$)

CCT= 2651K Prcp WL: Ld=584.0nm Purity=64.9%

Peak WL: Lp=609nm FWHM: =113.8nm Ratio:R=25.7% G=72.2% B=2.1%

Render Index: Ra = 84.3

R1 =83 R2 =92 R3 =97 R4 =84 R5 =84 R6 =93 R7 =83

R8 =60 R9 =12 R10=83 R11=85 R12=83 R13=85 R14=99 R15=74

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 267.46 lm Eff. : 0.00 lm/W Fe = 833.75 mW


Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831186

<https://eprel.ec.europa.eu/qr/831186>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands