

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L151801830

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba15d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	660 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	18	
	Depth	18	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,450 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	12	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-03-17 14:51:44
Specification	: L151801830	Sam. Status	:
Sample No.	: L151801830 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 57457 (88%)
Test Mode	: Fast Test	T	: 36 ms
		Sensitivity	: High

Spectrum

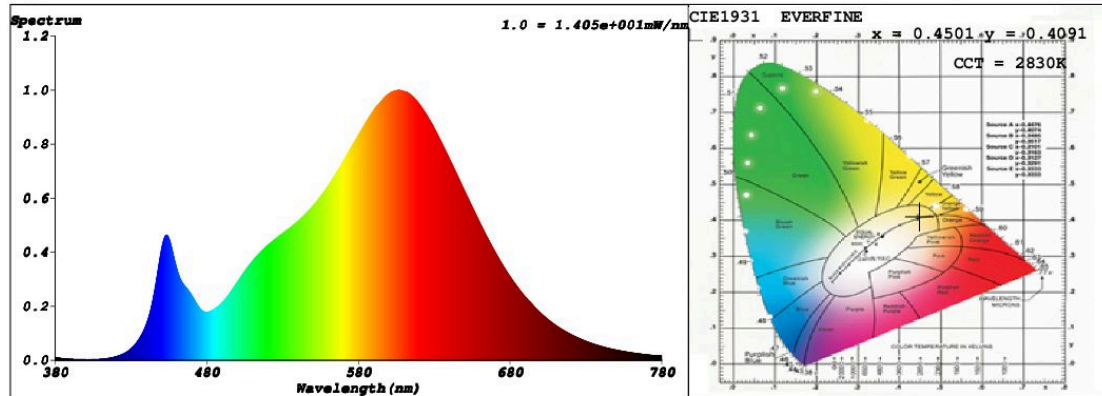

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4501$ $y = 0.4091$ / $u' = 0.2569$ $v' = 0.5253$ ($duv=3.56e-04$)

CCT= 2830K Prcp WL: Ld=583.5nm Purity=57.9%

Peak WL: Lp=606nm FWHM: =124.0nm Ratio:R=24.3% G=73.3% B=2.4%

Render Index: Ra = 83.5

R1 =82 R2 =92 R3 =96 R4 =81 R5 =82 R6 =91 R7 =83

R8 =60 R9 =12 R10=82 R11=81 R12=73 R13=85 R14=99 R15=75

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 662.99 lm Eff. : 106.85 lm/W Fe = 2.0555 W


Electrical parameters

V = 229.9 V I = 0.03031 A P = 6.205 W PF = 0.8904

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831334

<https://eprel.ec.europa.eu/qr/831334>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands