

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L227239930

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,442 0,408
Parameters for LED and OLED light sources:			
R9 colour rendering index value	6	Survival factor	0,90
the lumen maintenance factor	0,93		

(a) : not applicable;

(b) : not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2018-03-20 11:42:18
Specification	:	Sam. Status	:
Sample No.	: L227239930-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Ralf
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 47802 (73%)
Test Mode	: Fast Test	T	: 84 ms
		Sensitivity	: High

Spectrum

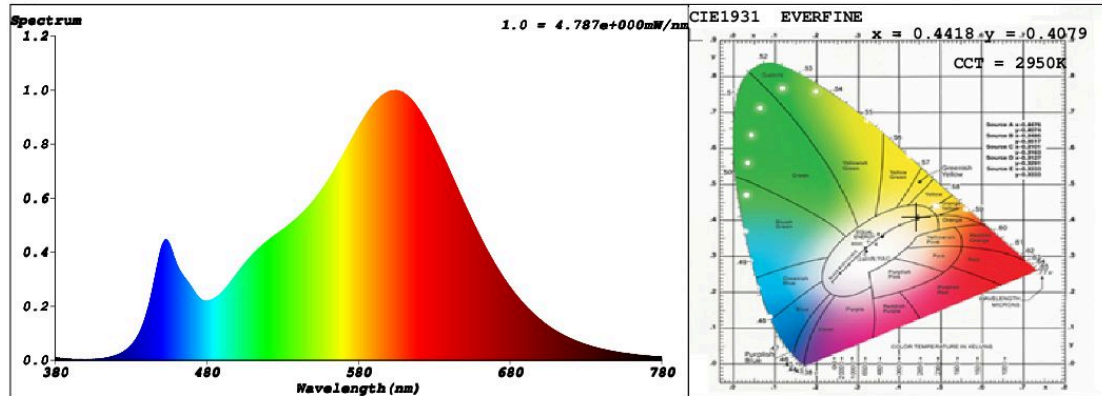

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4418$ $y = 0.4079$ / $u' = 0.2521$ $v' = 0.5236$ ($duv=8.63e-04$)

CCT= 2950K Prcp WL: $L_d=582.7nm$ Purity=55.0%

Peak WL: $L_p=605nm$ FWHM: $=122.8nm$ Ratio:R=23.2% G=74.1% B=2.7%

Render Index: $R_a = 82.5$

R1 =81 R2 =92 R3 =95 R4 =80 R5 =81 R6 =91 R7 =82

R8 =58 R9 =6 R10=82 R11=79 R12=73 R13=84 R14=98 R15=73

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 230.82 lm Eff. : 0.00 lm/W $F_e = 699.69 mW$


Electrical parameters

$V = 0 V$ $I = 0 A$ $P = 0 W$ PF = 0

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831348

<https://eprel.ec.europa.eu/qr/831348>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands