

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L276505501

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 050 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...2700
On-mode power (P_{on}), expressed in W	14,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,460 0,414	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	91	Survival factor	0,70	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample : 1
 Specification :
 Sample No. : L276505501-1
 Manufacturer :


Date : 2017-02-20 11:26:54
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 48090 (73%)
 T : 15 ms
 Sensitivity : High

Spectrum

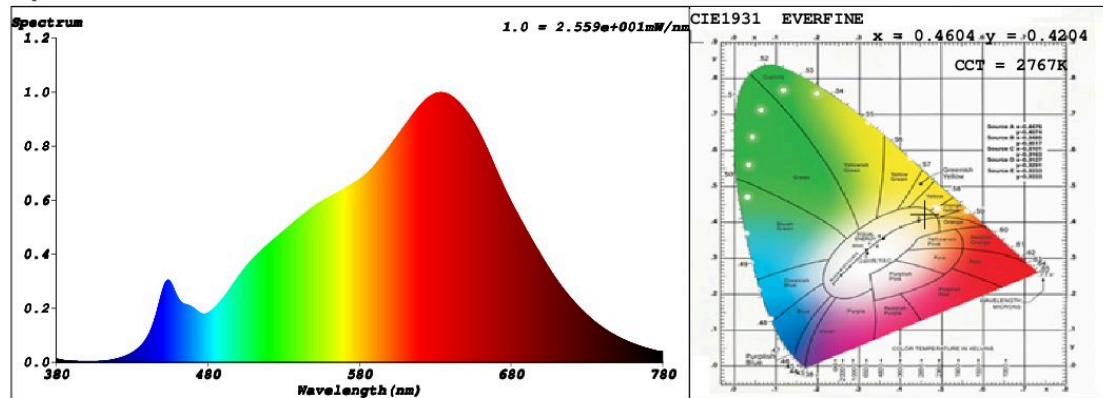

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4604$ $y = 0.4204$ / $u' = 0.2585$ $v' = 0.5311$ ($duv=3.53e-03$)

CCT= 2767K Prcp WL: $L_d=582.8nm$ Purity=64.4%

Peak WL: $L_p=634nm$ FWHM: $=156.3nm$ Ratio: R=26.1% G=71.4% B=2.5%

Render Index: $R_a = 96.2$

R1 =97 R2 =97 R3 =95 R4 =98 R5 =96 R6 =97 R7 =98

R8 =93 R9 =81 R10=92 R11=99 R12=83 R13=97 R14=96 R15=94

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 1141.1 lm Eff. : 83.51 lm/W Fe = 4.1907 W


Electrical parameters

V = 230.1 V I = 0.06356 A P = 13.66 W PF = 0.9343

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831425

<https://eprel.ec.europa.eu/qr/831425>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands