

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L277041830

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,437 0,400	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	6	Survival factor	0,90	
the lumen maintenance factor	0,93			

(a) : not applicable;

(b) : not applicable;

SPL Spectrum Test Report

Sample :
Specification : LB276064030KE
Sample No. : L277041830-1
Manufacturer :


Date : 2020-08-28 14:40:41
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Schiefer
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 46851 (71%)
T : 18 ms
Sensitivity : High

Spectrum

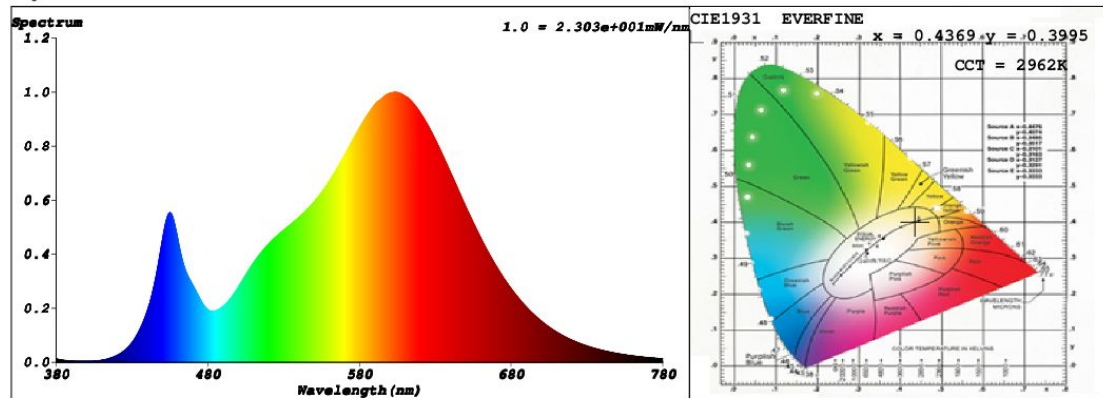

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4369$ $y = 0.3995$ / $u' = 0.2526$ $v' = 0.5196$ ($duv = -1.83e-03$)

CCT= 2962K Prcp WL: Ld=583.7nm Purity=51.1%

Peak WL: Lp=604nm FWHM: =124.5nm Ratio:R=23.2% G=74.2% B=2.6%

Render Index: Ra = 81.9

R1 =81 R2 =92 R3 =95 R4 =79 R5 =81 R6 =89 R7 =81
R8 =58 R9 =6 R10=80 R11=77 R12=71 R13=83 R14=98 R15=74

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 1111.2 lm Eff. : 94.32 lm/W Fe = 3.4006 W


Electrical parameters

V = 59.95 V I = 0.3842 A P = 11.78 W PF = 0.5115

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831426

<https://eprel.ec.europa.eu/qr/831426>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands