

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L278011727

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	515 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,468 0,424	
Parameters for directional light sources:				
Peak luminous intensity (cd)	250	Beam angle in degrees, or the range of beam angles that can be set	110	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	14	Survival factor	0,70	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;




SPL Spectrum Test Report

Sample : Date : 2017-12-13 09:32:30
Specification : Sam. Status :
Sample No. : L278011727-2 Instrument : HaasSuite(EVERFINE)
Manufacturer : Test by :
Assessor : damin

Test Condition

Temperature : 25.3Deg RH : 65.0%
WL Range : 380nm-780nm IP : 50548 (77%)
Test Mode : Fast Test T : 22 ms
Sensitivity : High

Spectrum

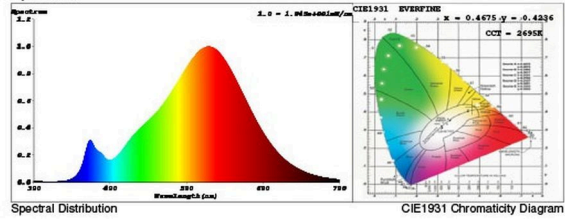

Colorimetric Parameters

Chromaticity Coordinates: $x = 0.4675$ $y = 0.4236$ / $u' = 0.2616$ $v' = 0.5333$ ($duv = 4.09e-03$)

CCT= 2695K Prop WL: $\lambda_d = 583.0nm$ Purity=67.5%

Peak WL: $\lambda_p = 610nm$ FWHM: $= 128.8nm$ Ratio: R=24.9% G=73.0% B=2.1%

Render Index: Ra = 83.0

R1=81 R2=90 R3=98 R4=80 R5=80 R6=88 R7=85

R8=61 R9=14 R10=78 R11=78 R12=68 R13=83 R14=99 R15=74

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters


Flux = 870.95 lm Eff. : 89.39 lm/W $\Phi_e = 2.7288 W$

Electrical parameters

V = 220.0 V I = 0.08241 A P = 9.744 W PF = 0.5374

Schleifer Professional Lighting
www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831462

<https://eprel.ec.europa.eu/qr/831462>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands