

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L419959927-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	S14s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,458 0,415	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,90	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

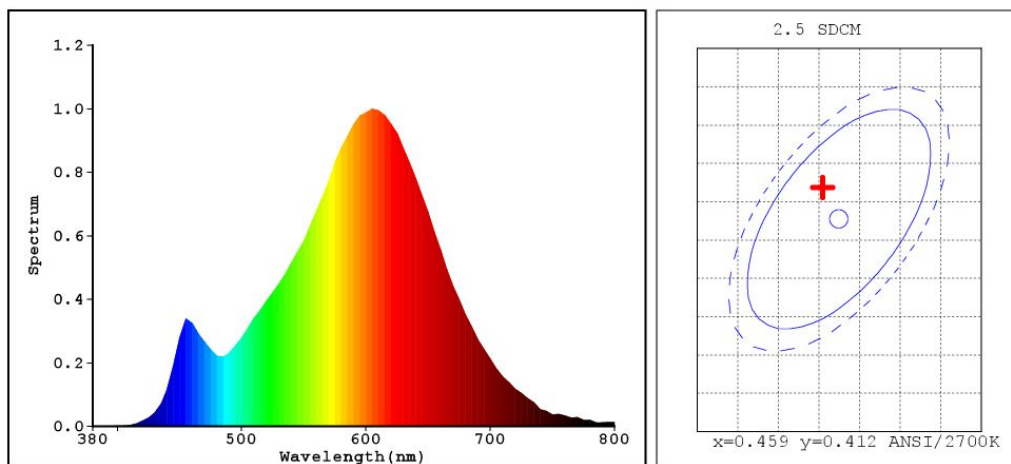

Color Parameters:

Chromaticity Coordinate: $x=0.4573$ $y=0.4153$ Chromaticity Coordinate: $u'=0.2588$ $v'=0.5287$ ($duv=1.98e-03$)

Tc=2773K Dominant WL:Ld=583.2nm Purity=61.9% Centroid WL:597.0nm

Ratio:R=26.0% G=71.8% B=2.2% Peak WL:Lp=605.0nm HWL:126.4nm

Render Index:Ra=81.8

R1 =80 R2 =91 R3 =96 R4 =78 R5 =80 R6 =89 R7 =82

R8 =59 R9 =10 R10=80 R11=75 R12=71 R13=82 R14=98 R15=73

Photo Parameters:

Flux: 339.49 lm Fe: 0.98473 W Efficacy:58.73 lm/W

Electrical Parameters:

Lamp : U=230.7V I=0.02560A P=5.780W PF=0.9785

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=7810 (R=3)

%-0.156%

Ip=866 (G=4, D=51)

PMT: 26.1 centigrade [150.0]

Product Type:L419959927-1

Number:1

Temperature:25.3 deg

Test Operator:

Software:V2.00.129

Manufacturer:LUMARTEC


Test Department:LUMARTEC

Humidity:65.0%

Test Date:2018-05-10 11:29:03

Instrument:PMS-80_V1 (SN:G107113CA8321121)

Model placed on the Union market from 01/09/2021



EPREL registration number: 831481

<https://eprel.ec.europa.eu/qr/831481>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands