

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L641771927

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,457 0,409	
Parameters for directional light sources:				
Peak luminous intensity (cd)	865	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	90	Survival factor	1,00	
the lumen maintenance factor	0,75			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-07-19 14:58:17
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Renee
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	50850 (78%)
Test Mode	:	Fast Test	T	:	42 ms
			Sensitivity	:	High

Spectrum

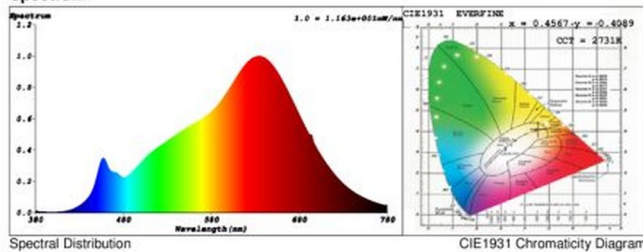

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4567$ $y = 0.4089$ / $u' = 0.2613$ $v' = 0.5262$ ($duv = -3.69e-04$)
 CCT= 2731K Prcp WL: Ld=584.2nm Purity=59.8%
 Peak WL: Lp=634nm FWHM: =151.2nm Ratio:R=27.1% G=70.0% B=2.9%

Render Index: Ra = 97.5

R1 =99 R2 =99 R3 =99 R4 =99 R5 =98 R6 =96 R7 =96
 R8 =95 R9 =90 R10=98 R11=97 R12=88 R13=98 R14=98 R15=98
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 500.39 lm Eff. : 100.72 lm/W Fe = 1.9179 W


Electrical parameters

V = 229.8 V I = 0.03287 A P = 4.968 W PF = 0.6578

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831566

<https://eprel.ec.europa.eu/qr/831566>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands