

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023981305

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W		4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	340	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	180		
	Depth	180		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,528 0,417	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	17	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
 Specification : LF023981305
 Sample No. : LF023981305 01
 Manufacturer :


Date : 2021-04-22 15:10:44
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 55913 (85%)
 T : 63 ms
 Sensitivity : High

Spectrum

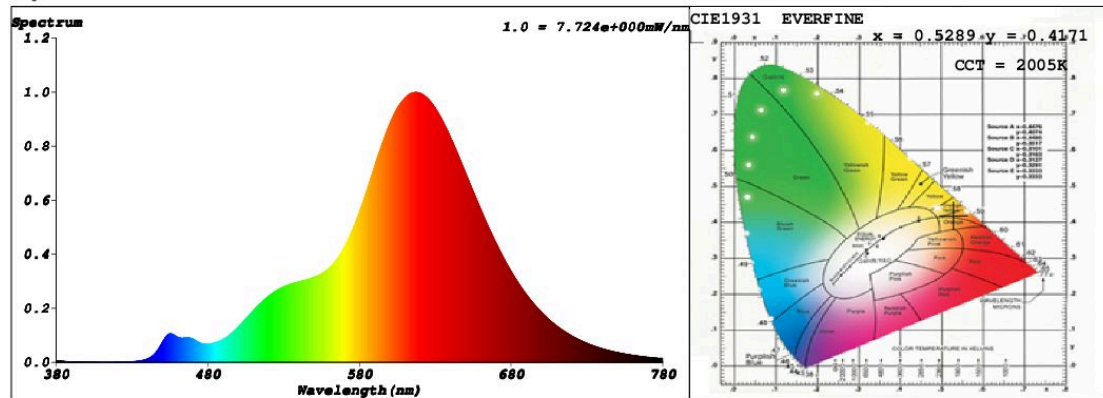

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5289$ $y = 0.4171$ / $u' = 0.3045$ $v' = 0.5403$ ($duv=1.19e-03$)

CCT= 2005K Prcp WL: $\lambda_d=588.5nm$ Purity=83.9%

Peak WL: $\lambda_p=617nm$ FWHM: $\approx 89.3nm$ Ratio: R=34.5% G=64.3% B=1.2%

Render Index: $R_a = 85.6$

R1 =87 R2 =97 R3 =93 R4 =88 R5 =89 R6 =95 R7 =79

R8 =58 R9 =17 R10=93 R11=94 R12=91 R13=90 R14=97 R15=75

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 260.82 lm Eff. : 64.44 lm/W $P_e = 891.10 mW$


Electrical parameters

V = 230.0 V I = 0.02021 A P = 4.047 W PF = 0.8704

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831878

<https://eprel.ec.europa.eu/qr/831878>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands