

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF024060507

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		550 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		6,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	130	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	58		
	Depth	58		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,470 0,418	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	61	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : LF024060507
Sample No. : LF024060507 1
Manufacturer :


Date : 2020-10-27 15:24:46
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Schiefer
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 49122 (75%)
T : 36 ms
Sensitivity : High

Spectrum

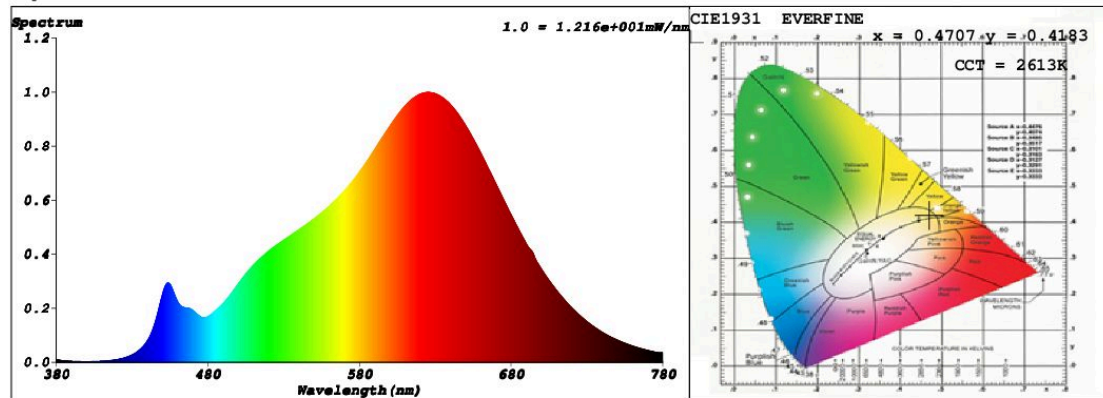

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4707$ $y = 0.4183$ / $u' = 0.2660$ $v' = 0.5319$ ($duv=1.97e-03$)

CCT= 2613K Prcp WL: $L_d=584.0nm$ Purity=66.9%

Peak WL: $L_p=626nm$ FWHM: $=142.1nm$ Ratio: $R=27.2\%$ $G=70.5\%$ $B=2.3\%$

Render Index: $R_a = 94.0$

$R_1=94$ $R_2=97$ $R_3=100$ $R_4=95$ $R_5=94$ $R_6=98$ $R_7=92$

$R_8=82$ $R_9=61$ $R_{10}=93$ $R_{11}=97$ $R_{12}=86$ $R_{13}=95$ $R_{14}=99$ $R_{15}=89$

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 537.60 lm Eff. : 0.00 lm/W $Fe = 1.9219 W$


Electrical parameters

$V = 0 V$ $I = 0 A$ $P = 0 W$ PF = 0

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 831894

<https://eprel.ec.europa.eu/qr/831894>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands