

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF024116588

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	6,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,486 0,413	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	65	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;


(b) '-': not applicable;

Sample	: 5-5	Date	: 2017-10-10 13:57:56
Specification	: LF02411658	Sam. Status	:
Sample No.	: LF02411658	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51449 (79%)
Test Mode	: Fast Test	T	: 36 ms
		Sensitivity	: High

Spectrum

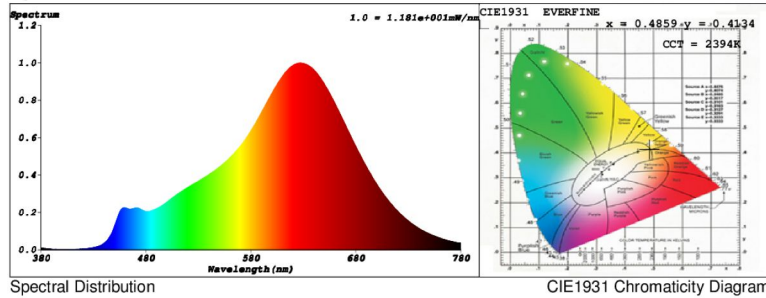

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4859$ $y = 0.4134$ / $u' = 0.2781$ $v' = 0.5323$ ($duv = -4.23e-04$)
 CCT= 2394K Prpc WL: Ld=586.1nm Purity=69.9%
 Peak WL: Lp=628nm FWHM: =123.8nm Ratio:R=29.9% G=67.6% B=2.5%

Render Index: Ra = 93.1
 R1 = 97 R2 = 98 R3 = 94 R4 = 95 R5 = 97 R6 = 93 R7 = 89
 R8 = 81 R9 = 65 R10 = 97 R11 = 98 R12 = 86 R13 = 99 R14 = 98 R15 = 91
 LEVEL:OUT WHITE:OUT


Photometric & Radiometric Parameters

Flux = 470.83 lm Eff. : 78.85 lm/W Fe = 1.7685 W

Electrical parameters

V = 230.0 V I = 0.03180 A P = 5.971 W PF = 0.8165

Model placed on the Union market from 07/06/2021



EPREL registration number: 831906

<https://eprel.ec.europa.eu/qr/831906>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands