## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: Ecosense Lighting

Supplier's address: Public contact, Via XXV Aprile 75B, Casorate Sempione (VA) 21011, Italy

Model identifier: SM16-09-36D-930-03

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	GU5.3		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers


**Product parameters** 

## Parameter Parameter Value Value **General product parameters:** Energy consumption in on-9 Energy efficiency G mode (kWh/1000 h), rounded class up to the nearest integer Useful luminous flux (duse), in-450 in Nar-Correlated colour 3 000 dicating if it refers to the flux in row cone (90°) temperature, a sphere (360°), in a wide cone rounded to the near-(120°) or in a narrow cone (90°) est 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set 9,0 0,00 On-mode power (P<sub>on</sub>), Standby power (P<sub>sb</sub>), expressed in W expressed in W and rounded to the second decimal Colour rendering in-95 Networked standby power (P<sub>net</sub>) for CLS, expressed in W dex, rounded to the and rounded to the second decnearest integer, or the range of CRI-valimal ues that can be set Outer dimen-45 Spectral power dis-See image Height sions without tribution in the in last page Width 50 separate conrange 250 nm to 800 Depth 50 trol gear, lightnm, at full-load

ing control parts and non- lighting con- trol parts, if any (millime-				
tre)				
Claim of equivalent power <sup>(a)</sup>	-	lf yes, equivalent power (W)	-	
		Chromaticity coordi-	0,440	
		nates (x and y)	0,403	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 280	Beam angle in de- grees, or the range of beam angles that can be set	36	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	95	Survival factor	1,00	
the lumen maintenance factor	0,96			
(a), Longt and Kashlar				

(a)<sub>'-'</sub> : not applicable;

(b)'-' : not applicable;

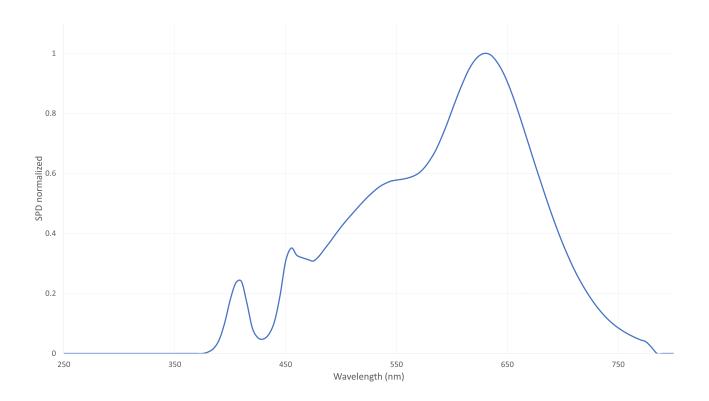

Model placed on the Union market from 01/01/2022



EPREL registration number: 854617

Supplier: Ecosense Lighting (Importer)

**Customer care service:** 

Name: Public contact

Email: techsupport-soraa@ecosenselighting.com

Address: Via XXV Aprile 75B, Casorate Sempione (VA) 21011, Italy https://eprel.ec.europa.eu/qr/854617

Website:

Website: <a href="https://www.ecosenseligh">https://www.ecosenseligh</a> ting.com/

Phone: +44 (0)1753 628 499