

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L641800930

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	R7s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	830 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,440 0,400	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample :
Specification : L641800930
Sample No. : 2
Manufacturer :


Date : 2021-08-11 15:47:49
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Renee
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 51281 (78%)
T : 25 ms
Sensitivity : High

Spectrum

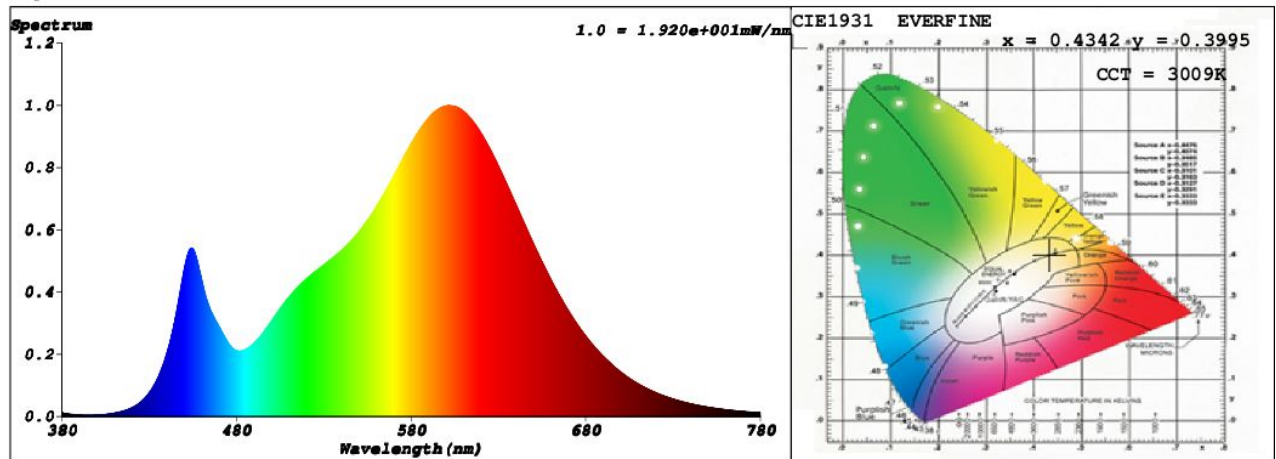

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4342$ $y = 0.3995$ / $u' = 0.2508$ $v' = 0.5192$ ($duv = -1.45e-03$)

CCT= 3009K Prcp WL: $L_d = 583.3nm$ Purity=50.2%

Peak WL: $L_p = 602nm$ FWHM: $= 122.0nm$ Ratio: R=22.8% G=74.5% B=2.7%

Render Index: $R_a = 81.6$

R1 =80 R2 =92 R3 =95 R4 =78 R5 =81 R6 =90 R7 =81

R8 =56 R9 =3 R10=81 R11=77 R12=72 R13=83 R14=98 R15=73

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 929.67 lm Eff. : 161.55 lm/W $\Phi_e = 2.8254 W$


Electrical parameters

V = 229.8 V I = 0.03460 A P = 5.755 W PF = 0.7239

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 20/07/2021



EPREL registration number: 860468

<https://eprel.ec.europa.eu/qr/860468>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands