## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

<b>Supplier's name or trade mark:</b> Ecosen	se Lighting
----------------------------------------------	-------------

Supplier's address: Public contact, Via XXV Aprile 75B, Casorate Sempione (VA) 21011, Italy

Model identifier: SR111-18-36D-927-03-S3

_	•			
Type	Λt	liaht	COLL	rca.
IVDE	VI.	HEIIL	SOU	LC.

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	G53		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers


## **Product parameters**

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
٠,	nption in on- 00 h), rounded st integer	19	Energy efficiency class	G	
dicating if it refe a sphere (360º) (120º) or in a na	s flux (фuse), in- ers to the flux in , in a wide cone errow cone (90º)	855 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700	
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	18,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00	
(P <sub>net</sub> ) for CLS, 6	andby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	95	
Outer dimen-	Height	57	Spectral power dis-	See image	
sions without	Width	111	tribution in the	in last page	
separate con- trol gear, light-	Depth	111	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	92
		Chromaticity coordi-	0,459
		nates (x and y)	0,412
Parameters for directional light sources:			
Peak luminous intensity (cd)	2 320	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	95	Survival factor	1,00
the lumen maintenance factor	0,96		

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

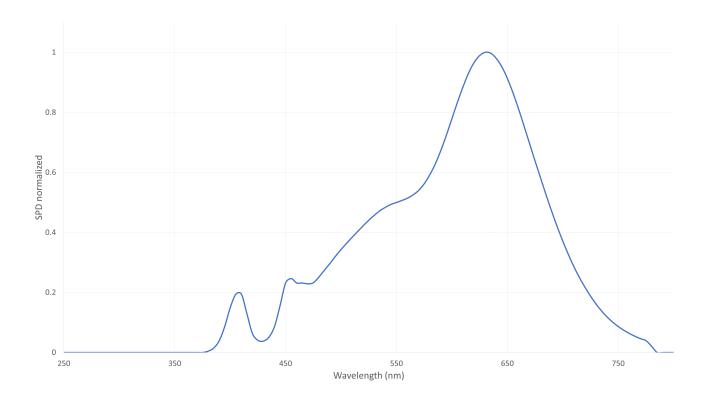

Model placed on the Union market from 01/01/2022



EPREL registration number: 878268 https://eprel.ec.europa.eu/qr/878268

**Supplier:** Ecosense Lighting (Importer) Website:

Customer care service:

Name: Public contact Website: https://www.ecosenseligh

ting.com/

Email: techsupport-soraa@ecosenselighting.com Phone: +44 (0)1753 628 499

**Address:** 

Via XXV Aprile 75B, Casorate Sempione (VA)

21011, Italy