Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ecosense Lig	ighting	
--	---------	--

Supplier's address: Public contact, Via XXV Aprile 75B, Casorate Sempione (VA) 21011, Italy

Model identifier: SA60E27-11-OMNI-927-01-S3

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	E27		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers


Product parameters

Froduct parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
_ · · · · ·	mption in on- 00 h), rounded st integer	11	Energy efficiency class	G	
dicating if it refe a sphere (360º) (120º) or in a na	s flux (φuse), in- ers to the flux in , in a wide cone arrow cone (90º)	850 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700	
On-mode pow pressed in W	ver (P _{on}), ex-	11,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00	
(P _{net}) for CLS, 6	tandby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	95	
Outer dimen-	Height	115	Spectral power dis-	See image	
sions without	Width	60	tribution in the	in last page	
separate con- trol gear, light-	Depth	60	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)							
Claim of equival	ent power ^(a)	Yes	If yes, equivalent power (W)	62			
			Chromaticity coordi-	0,459			
			nates (x and y)	0,410			
Parameters for LED and OLED light sources:							
R9 colour rende	ring index value	95	Survival factor	1,00			
the lumen maintenance factor		0,96					
Parameters for	Parameters for LED and OLED mains light sources:						
displacement fa	ctor (cos φ1)	0,92	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (P	st LM)	0,4	Stroboscopic effect metric (SVM)	1,0			

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

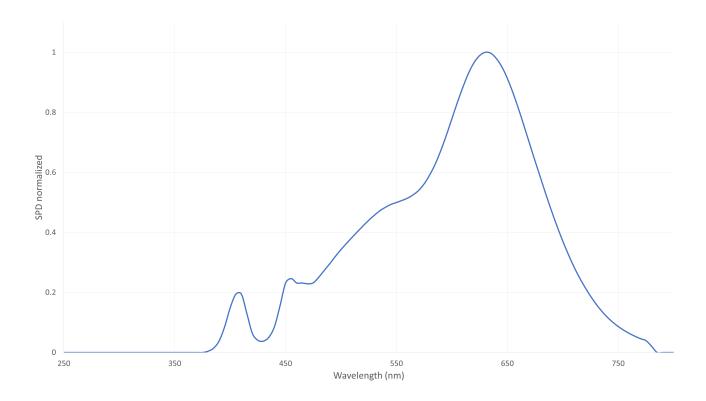

Model placed on the Union market from 12/01/2023



EPREL registration number: 881575 https://eprel.ec.europa.eu/qr/881575

Supplier: Ecosense Lighting (Importer) Website:

Customer care service:

Name: Public contact Website: https://www.ecosenseligh

ting.com/

Email: techsupport-soraa@ecosenselighting.com Phone: +44 (0)1753 628 499

Address:

Via XXV Aprile 75B, Casorate Sempione (VA)

21011, Italy