Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark:	LED Panel for Fanaway Orbit
--------------------------------	-----------------------------

Supplier's address: Beacon Lighting Europe GmbH, Campus Fichtenhain 42, 47807 Krefeld, DE

Model	identifier:	21066LED

Type	٥f	liah+		
Type	OI.	IIKIIL	Soui	ce.


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	N/A		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Froduct parameters				
Parameter		Value	Parameter	Value
General product parameters:				
	mption in on- 00 h), rounded st integer	23	Energy efficiency class	E
dicating if it refe a sphere (360º)	s flux (фuse), in- ers to the flux in , in a wide cone arrow cone (90º)	2 500 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode pow pressed in W	ver (P _{on}), ex-	22,5	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00
(P _{net}) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80
Outer dimen-	Height	20	Spectral power dis-	See image
sions without	Width	400	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	400	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime-				
tre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordi-	0,438	
		nates (x and y)	0,403	
Parameters for LED and OLED lig	ght sources:			
R9 colour rendering index value	4	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED m	Parameters for LED and OLED mains light sources:			
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,7	

(a)'-': not applicable; (b)'-': not applicable;

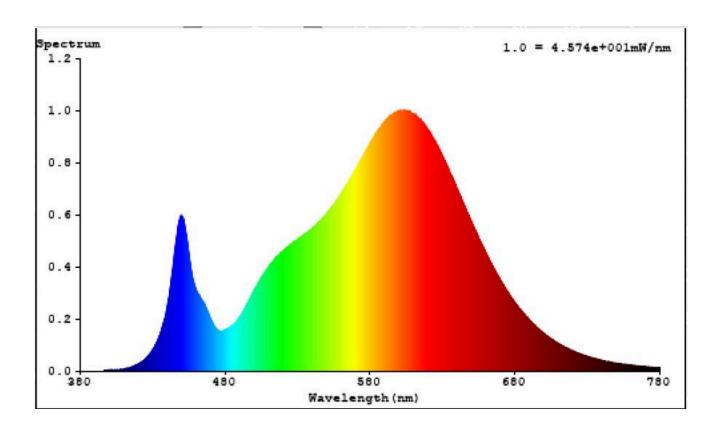

Model placed on the Union market from 07/06/2021



EPREL registration number: 899213 https://eprel.ec.europa.eu/qr/899213

Supplier: Beacon Lighting Europe GmbH (Manufacturer) Website: www.beaconlighting-europ

e.com

Customer care service:

Name: Beacon Lighting Europe GmbH Website: www.beaconlighting-europ

e.com

Email: info@beaconlighting-europe.com Phone: +4921513258239

Address:

Campus Fichtenhain 42

47807 Krefeld Germany