Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

Model identifier: 115894

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	WIRE		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	36	Energy efficiency class	D
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	4 350 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	36,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control — Height	30	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	620		
Outer dimensions without separate control gear, lighting control — Depth	30		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,375 0,373
Parameters for directional light sources:				
Peak luminous intensity (cd)		4 350	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value		1	Survival factor	0,90
the lumen maintenance factor		0,70		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

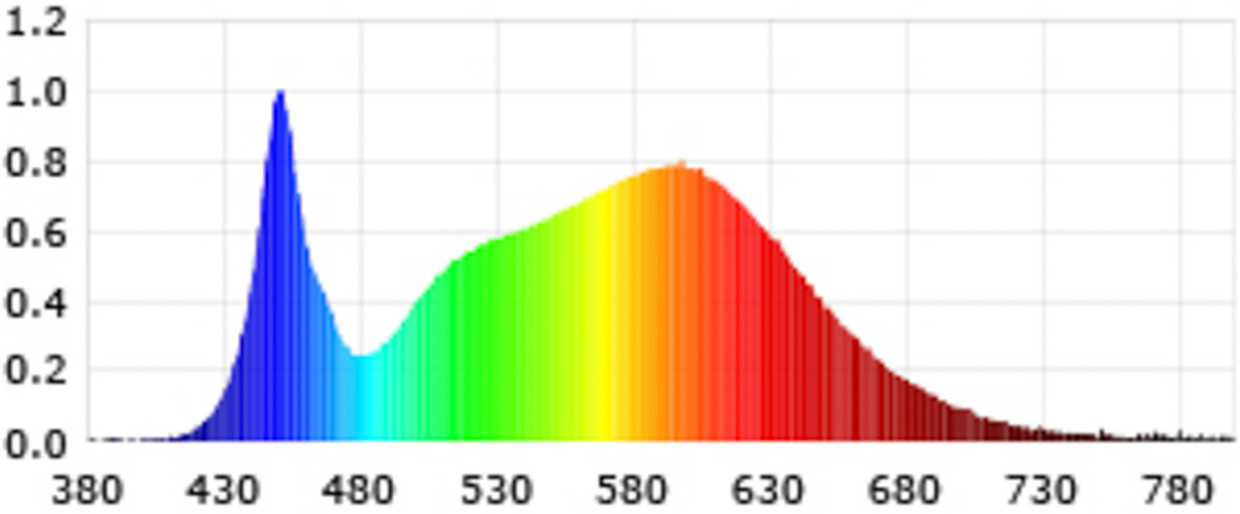
1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
430
480
530
580
630
680
730
780

Model placed on the Union market from 04/07/2022

EPREL registration number: 1304390

https://eprel.ec.europa.eu/qr/1304390

Supplier: ISOLED FIAI Handels GmbH (Manufacturer)

Website: www.isoled.at

Customer care service:

Name: Vertrieb

Website: https://isoled.shop

Email: office@isoled.at

Phone: +43 5372 219999

Address:
Egerbach 48
6334 Schwoich
Austria