

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LIGHT-POINT

Supplier's address: Legal, Grønnegade 3, 2. tv 1107 København K Danmark

Model identifier: 271050 MIRAGE W2

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	830 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...3000
On-mode power (P_{on}), expressed in W	14,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	94
Outer dimensions without separate control gear, lighting control	Height	140	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	140	
	Depth	15	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,430 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	65	Survival factor	0,90
the lumen maintenance factor	0,98		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,96	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	-

(a)-: not applicable;


(b)-: not applicable;

Spectral test report for lamp

Product type : 271052 Test time : 2023-01-03 16:13:23
 Product No. : CW332412CU01400-NA-CE-V906 3000K Test equipment : SPEC-2000A Spectrometer
 Manufacturer : VELLNICE Operator : GC1

CIE Color Parameter

Chromaticity coordinates: $x=0.4302$ $y=0.4006$ $u=0.2477$ $v=0.3460$ $u^*=0.2477$ $v^*=0.5190$
 Color temperature: 3393K ($\Delta u^*=0.00041$) Color difference: SDCM(ANSI/3000)=1.8 Main Wl $\lambda_d=485.02$ nm Purity: 0.045
 Peak wavelength $\lambda_p=617.9$ nm Centroid wavelength: 589.2 nm FWHM $\Delta \lambda_p=163.0$ nm Color ratio: R=0.258 G=0.710 B=0.032
 Color rendering index: Ra=93.93 Color Fidelity: Rf=91.53 Color Gamut: Rg=97.02 CAI=1264.63
 R1=96.1 R2=99.7 R3=95.5 R4=95.8 R5=96.1 R6=93.5 R7=89.8 R8=81.9
 R9=64.4 R10=99.3 R11=98.7 R12=81.5 R13=97.3 R14=90.9 R15=90.5

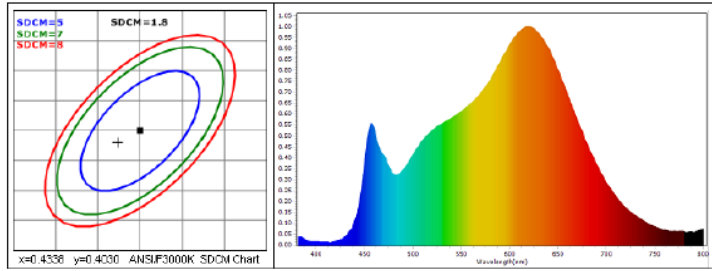

Optical Parameter

Luminous flux: 629.38 lm luminous efficiency: 45.71 lm/w Radiant flux: 2.21 W
 Energy efficiency index (EEI): 0.260 Energy efficiency class: B (EU 874/2012)

Electrical Parameter

Voltage (V): 230.40 Current (A): 0.0680 Watts (W): 13.770 Power factor: 0.9690


Test Information

Temperature : 25 Deg C Humidity : 53
 Test range : 360-800nm : 1nm Peak AD : 44760 (60.3%)
 Preheat time : 0 (min) Integral time : 120.06 (ms)

MEASUREFINE

Hangzhou HuiPu Instrument Co., Ltd. <http://www.measurefine.com>

Model placed on the Union market from 13/01/2023



EPREL registration number: 1612521

<https://eprel.ec.europa.eu/qr/1612521>

Supplier: LIGHT-POINT A/S (Manufacturer)

Website:

Customer care service:

Name: Legal

Website:

Email: bkr@light-point.com

Phone: +4522896666

Address:

Grønnegade 3, 2. tv
1107 København K
Danmark