Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Calex

Supplier's address: Electro Cirkel Retail BV - Public, Lyonstraat 29, 3047 AJ Rotterdam, the Netherlands

Model identifier: 1301008800

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	400 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height: 54 Width: 50 Depth: 50	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		Yes	If yes, equivalent power (W)	57
			Chromaticity coordinates (x and y)	0,460 0,420
Parameters for directional light sources:				
Peak luminous intensity (cd)		823	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:				
R9 colour rendering index value		6	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,95	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,9	Stroboscopic effect metric (SVM)	0,4

[a] '-' : not applicable;

[b] '-' : not applicable;

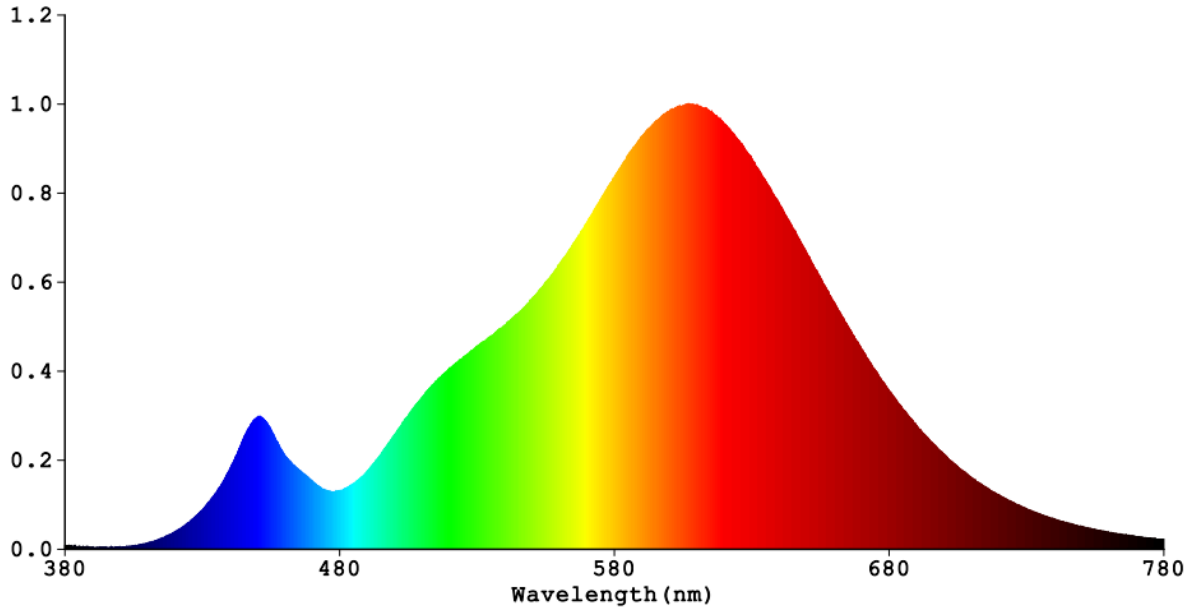
1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
480
580
680
780
Wavelength(nm)

Model placed on the Union market from 03/05/2024 to 11/03/2025.

EPREL registration number: 1875674

https://eprel.ec.europa.eu/qr/1875674

Supplier: Electro-Cirkel Retail B.V. (Manufacturer) **Website:** www.calex.eu

Customer care service:

Name: Electro Cirkel Retail BV - Public **Website:** www.calex.eu

Email: info@calex.eu **Phone:** +31 (0)10 298 19 80

Address:
Lyonstraat 29, 3047 AJ Rotterdam, the Netherlands