

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Belid Lighting Group

Supplier's address: Sales & customer support, Klasavägen 4, 43295 Varberg Halland, SE

Model identifier: 1585

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	kabel		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	42	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 100
On-mode power (P_{on}), expressed in W	42,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, light-	Height	1 150	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	120	
	Depth	40	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,429 0,399
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 456	Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:			
R9 colour rendering index value	7	Survival factor	-
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.': not applicable;

(b)'.': not applicable;

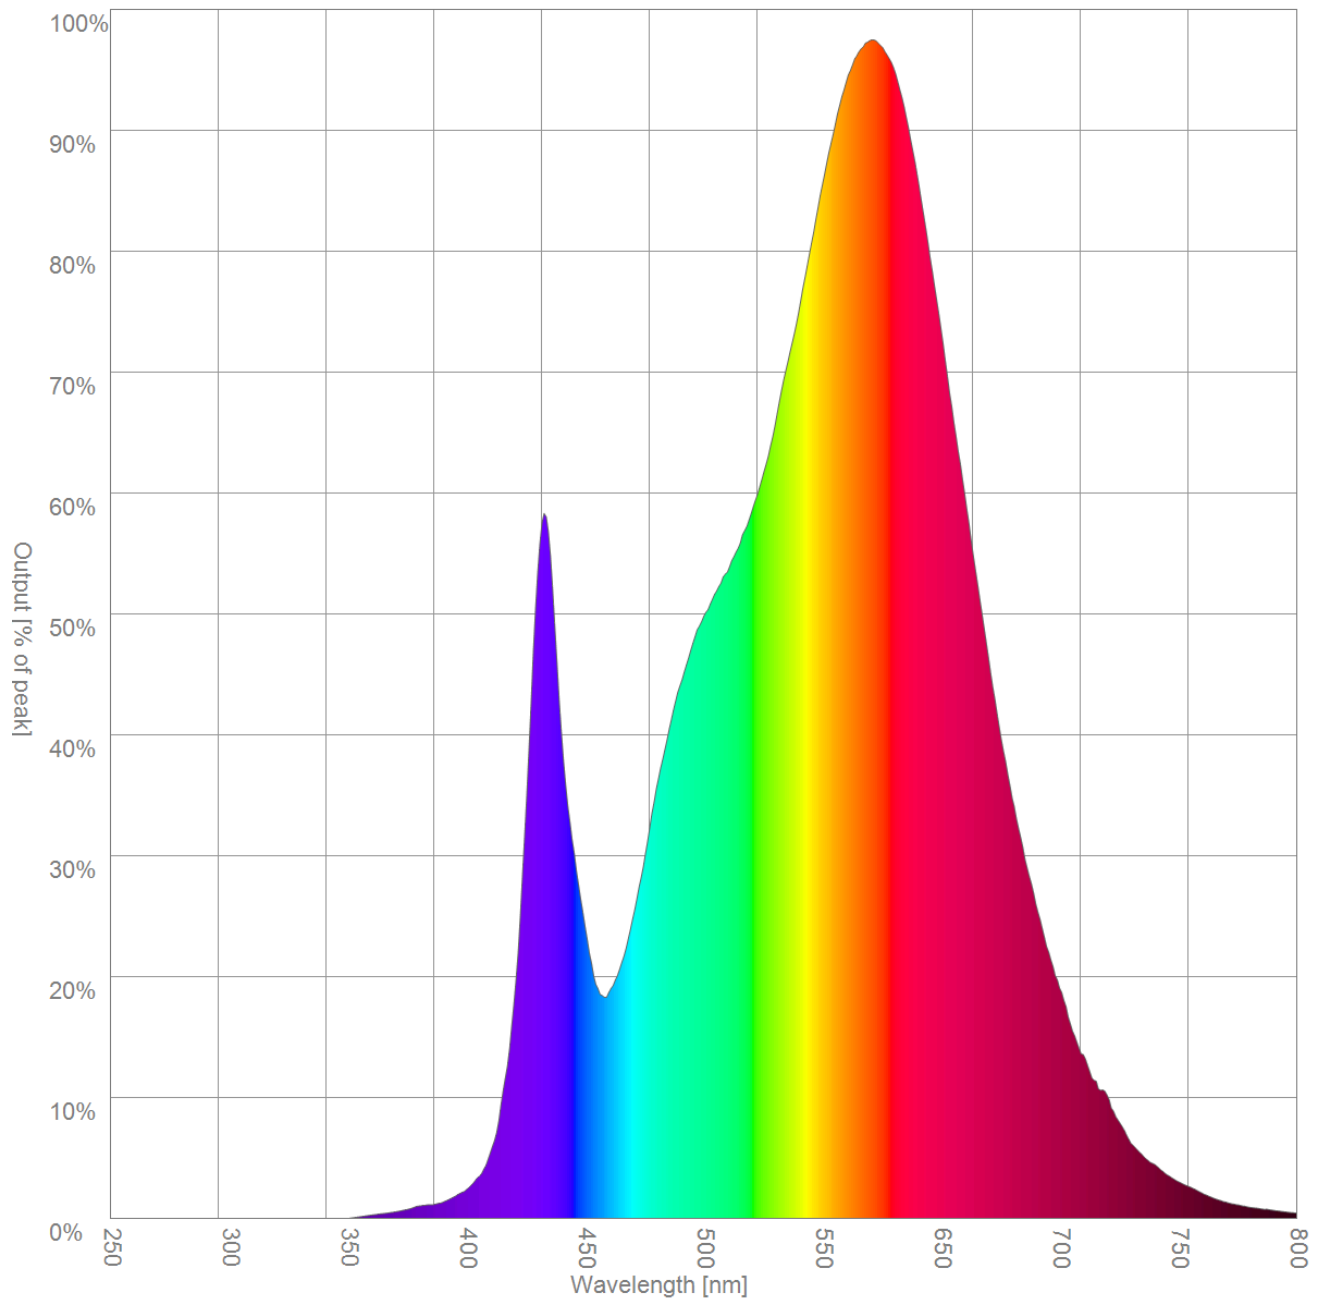

Model placed on the Union market from 01/01/2024



EPREL registration number: 1983607

<https://eprel.ec.europa.eu/qr/1983607>

Supplier: Belid Lighting Group (Manufacturer)

Website: www.belidlightinggroup.se

Customer care service:

Name: Sales & customer support

Website: www.belidlightinggroup.se

Email: order@belid.se

Phone: +46340 66 25 01

Address:

Klasavägen 4
43295 Varberg
Sweden