# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L641747927

**Type of light source:**

| | | | |
|---|---|---|---|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | GU10 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |

**Product parameters**

| Parameter | Value | Parameter | Value |
|---|---|---|---|
| **General product parameters:** | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 6 | Energy efficiency class | G |
| Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º) | 430 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power ($P_{on}$), expressed in W | 6,0 | Standby power ($P_{sb}$), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power ($P_{net}$) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 90 |
| Outer dimensions without separate control gear, lighting control — Height | 55 | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| Outer dimensions without separate control gear, lighting control — Width | 50 | | |
| Outer dimensions without separate control gear, lighting control — Depth | 50 | | |

| | | | | |
|---|---|---|---|---|
| parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power[(a)] | | - | If yes, equivalent power (W) | - |
| | | | Chromaticity coordinates (x and y) | 0,462<br>0,409 |
| **Parameters for directional light sources:** | | | | |
| Peak luminous intensity (cd) | | 3 000 | Beam angle in degrees, or the range of beam angles that can be set | 17 |
| **Parameters for LED and OLED light sources:** | | | | |
| R9 colour rendering index value | | 43 | Survival factor | 0,90 |
| the lumen maintenance factor | | 0,96 | | |
| **Parameters for LED and OLED mains light sources:** | | | | |
| displacement factor (cos ϕ1) | | 0,90 | Colour consistency in McAdam ellipses | 5 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | | -[(b)] | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | | 0,9 | Stroboscopic effect metric (SVM) | 0,3 |

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

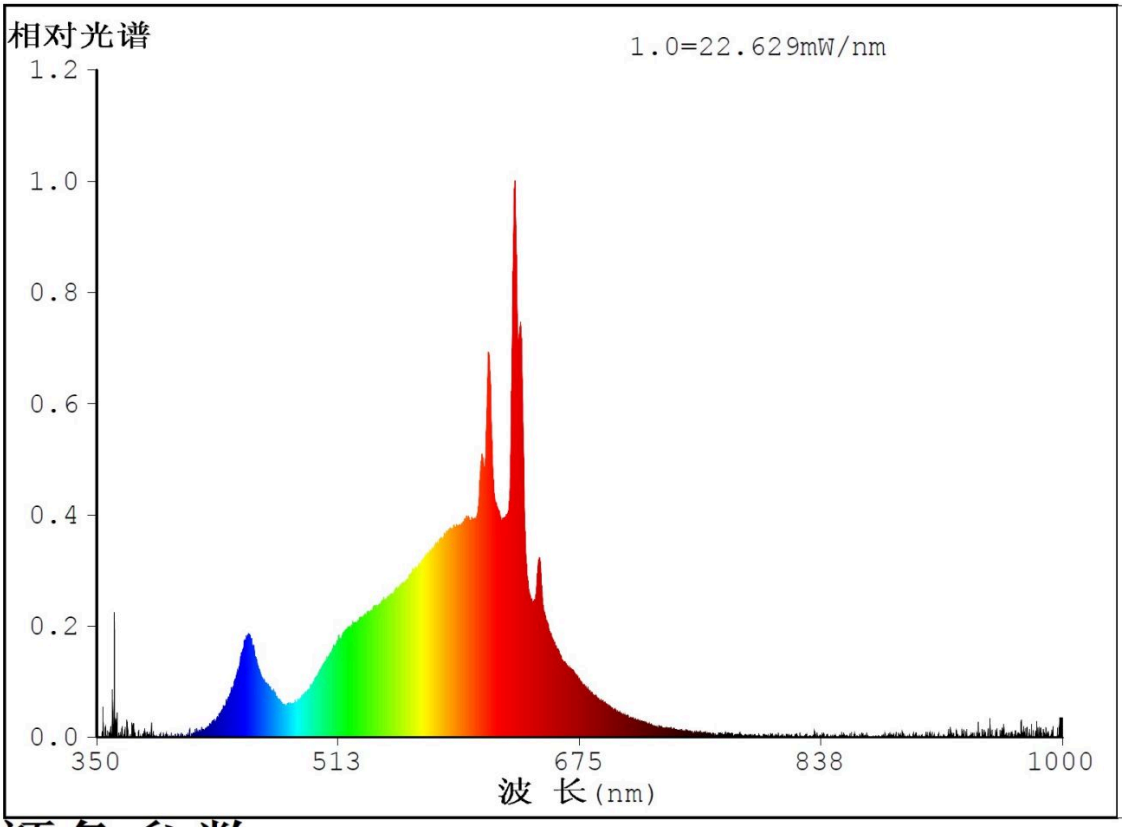
相对光谱
1.0=22.629mW/nm
1.2
1.0
0.8
0.6
0.4
0.2
0.0
350
513
675
838
1000
波 长(nm)

**EPREL registration number:** 2038096

Model placed on the Union market from 30/05/2024.

https://eprel.ec.europa.eu/qr/2038096

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer) **Website:** www.schiefer.nl

**Customer care service:**

**Name:** Schiefer Lighting **Website:** www.schiefer.nl

**Email:** info@schiefer.nl **Phone:** +31765037717

**Address:**
Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands