

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Tope Lighting

Supplier's address: Topenerga, UAB, Gamyklos 31I, 89103 Mažeikių Mažeikiai, LT

Model identifier: 6004000169

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


Product parameters


Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		22	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		2 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W		22,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	30	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	220		
	Depth	220		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,387 0,381	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	50	Survival factor	-	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	5,0	Stroboscopic effect metric (SVM)	-	

(a) '-': not applicable;

(b) '-': not applicable;

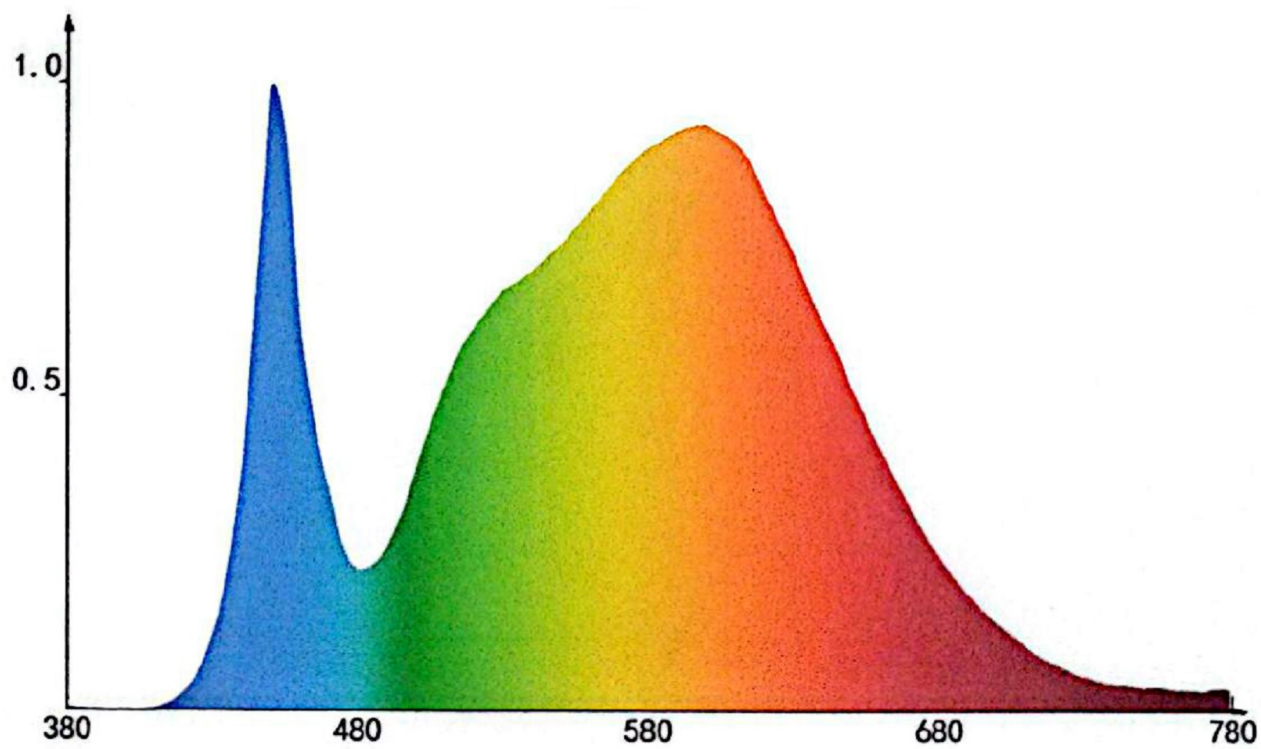

EPREL registration number: 2052273 Model placed on the Union market from 12/06/2024.	 https://eprel.ec.europa.eu/qr/2052273
Supplier: UAB 'Topenerga' (Importer)	Website: www.topelighting.com
Customer care service: Name: Topenerga, UAB Email: info@topenerga.lt Address: Gamyklos 31I 89103 Mažeikiai Lithuania Website: Phone: +370 612 12889	