Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: OE Lightning

Supplier's address: OE Lightning, Het Witte Hert 4, 1601 MJ Enkhuizen NH, NL

Model identifier: OE-R7s-78-4W

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	R7s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	E
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control — Height	78	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	16		
Outer dimensions without separate control gear, lighting control — Depth	16		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		Yes	If yes, equivalent power (W)	40
			Chromaticity coordinates (x and y)	0,465 0,420
Parameters for LED and OLED light sources:				
R9 colour rendering index value		3	Survival factor	0,90
the lumen maintenance factor		0,93		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,94	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,1

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

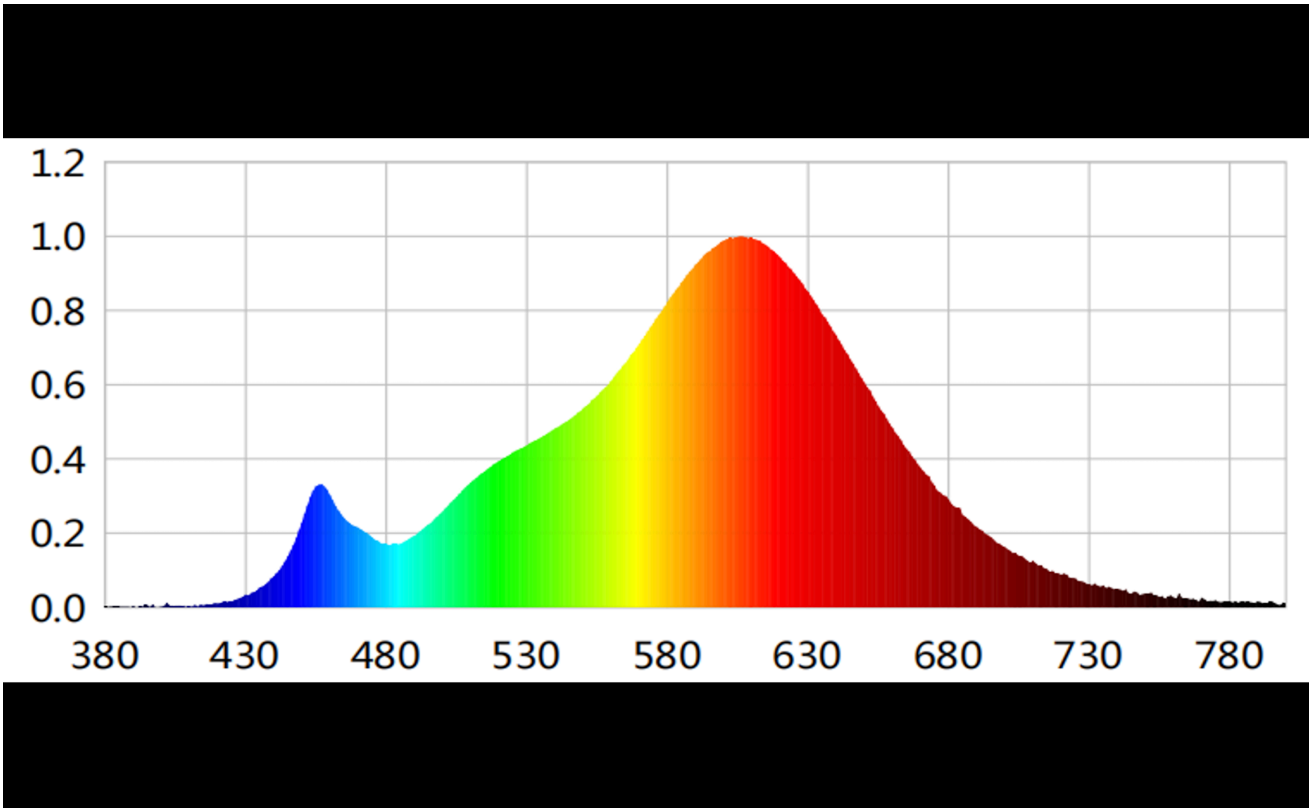
1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
430
480
530
580
630
680
730
780

EPREL registration number: 2108191

Model placed on the Union market from 19/08/2024.

https://eprel.ec.europa.eu/qr/2108191

Supplier: Orbit Electronic (Importer) **Website:** https://orbitelectronic.nl

Customer care service:

Name: OE Lightning **Website:** https://orbitelectronic.nl

Email: support@orbitelectronic.nl **Phone:** +31228528161

Address:
Het Witte Hert 4
1601 MJ Enkhuizen
Netherlands