Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Nuura

Supplier's address: Nuura Sales support, Frederiksgade 14 2. sal 1265 København K Denmark

Model identifier: 2175001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED-module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		4	Energy efficiency class	B
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)		646 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		3,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	35	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	35		
	Depth	2		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,457 0,410
Parameters for directional light sources:				
Peak luminous intensity (cd)		205	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value		52	Survival factor	1,00
the lumen maintenance factor		0,90		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

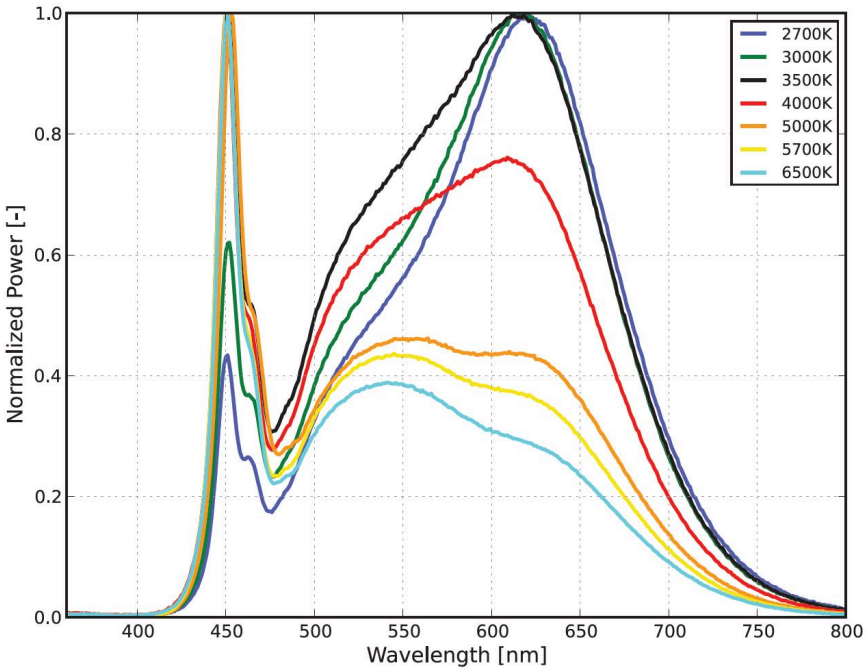
Normalized Power [-]
Wavelength [nm]
2700K
3000K
3500K
4000K
5000K
5700K
6500K
0.0
0.2
0.4
0.6
0.8
1.0
400
450
500
550
600
650
700
750
800

Model placed on the Union market from 01/02/2025 to 13/06/2025

EPREL registration number: 2224211

https://eprel.ec.europa.eu/qr/2224211

Supplier: Nuura ApS (Manufacturer)

Website: www.nuura.com

Customer care service:

Name: Nuura Sales support

Website: www.nuura.com

Email: info@nuura.com

Phone: 53738460

Address:
Frederiksgade 14 2. sal
1265 København K
Denmark