

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Homekit

**Supplier's address:** Atención al cliente, Av. Alcalde Lavadores 122. 36214 Vigo, Pontevedra. España

**Model identifier:** PN30X120B40F

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Bornas		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power ( $P_{on}$ ), expressed in W	40,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate con-	Height	295	Spectral power distribution in the
	Width	1 195	
	Depth	9	
			See image in last page


trol gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,316 0,341
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	1 209		Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	45		Survival factor	1,00
the lumen maintenance factor	0,90			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,80		Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,5		Stroboscopic effect metric (SVM)	0,8

(a): : not applicable;

(b): : not applicable;

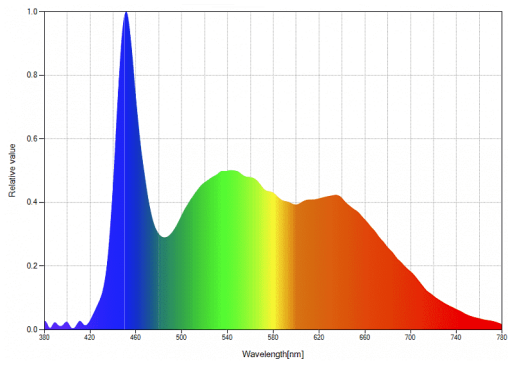

Model placed on the Union market from 26/03/2025



**EPREL registration number:** 2312456

<https://eprel.ec.europa.eu/qr/2312456>

**Supplier:** HOMEKIT SL (Importer)

**Website:**

**Customer care service:**

**Name:** Atención al cliente

**Website:**

**Email:** [comercial@homekit.es](mailto:comercial@homekit.es)

**Phone:** 886311868

**Address:**

Av. Alcalde Lavadores 122.  
36214 Vigo, Pontevedra.  
España