

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 863-002

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	495 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,460 0,410	
Parameters for directional light sources:				
Peak luminous intensity (cd)	8	Beam angle in degrees, or the range of beam angles that can be set	36	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	90	Survival factor	0,90	
the lumen maintenance factor	0,80			

(a) '-': not applicable;

(b) '-': not applicable;

Lightsource Test Report


Product Information

Product Type: WA-IDA-0801-2700K-36D-WH
Product Number: 15

Product Spec: WA-IDA-0801-2700K-36D-WH

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4666$ $y=0.4131$ $u(u')=0.2657$ $v=0.3529$ $v'=0.5293$
CCT: $T_c=2628K$ ($duv=0.00039$) Color Ratio: $R=0.270$ $G=0.712$ $B=0.018$
Peak Wavelength: 635.8nm Half Bandwidth: 151.8nm
Dominant Wavelength: 584.5nm Color Purity: 0.640
Central Wave: 613.0nm Gravity Wave: 620.6nm
CRI: $R_a=92.5$, $avgR(1\sim14)=89.7$, $avgR(1\sim15)=89.9$ TM30: $R_f=90$, $R_g=103$
GAI: $GAI_BB_8=101.4$, $GAI_BB_15=104.6$, $GAI_EES=47.0$
 $R1=94$ $R2=94$ $R3=91$ $R4=94$ $R5=92$ $R6=92$ $R7=94$ $R8=89$
 $R9=72$ $R10=84$ $R11=94$ $R12=79$ $R13=94$ $R14=94$ $R15=92$ $TLCI=86$
Color Quality Scale: $Q_a=89.0$, $Q_f=90.5$, $Q_p=93.4$, $Q_g=98.8$
 $Q1=87$ $Q2=96$ $Q3=86$ $Q4=88$ $Q5=88$ $Q6=84$ $Q7=85$ $Q8=91$
 $Q9=95$ $Q10=91$ $Q11=92$ $Q12=93$ $Q13=94$ $Q14=89$ $Q15=88$

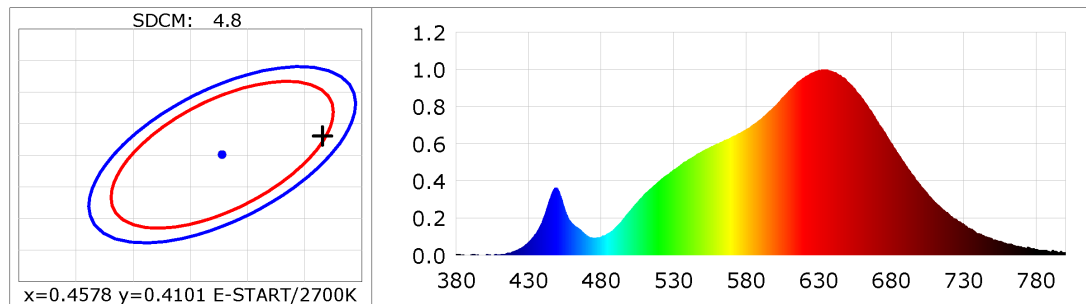

Photometric Parameters

Luminous Flux: 494.71 lm Efficiency: 48.26 lm/W Radiant Power: 1.820 W
Total mains efficacy: 48.26 lm/W Energy Efficiency Class: G (EU 2019/2015)
Pupil Flux: 568.76 Plm Pupil Lumens Per Watt: 55.49 Plm/W Pupil Factor (Kp): 1.150
Cirtopic Flux: 960.75 lm Melanin Flux: 0.254 W M/R: 0.4280 MDER: 0.3894

Electric Parameters

Voltage: 220.70V Current: 0.0470A Power: 10.25W
Power Factor: 0.9850 Frequency: 49.99Hz

Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Min ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 50112 (3279) CCD Integration Time: 417.84 ms

Condition: $T_x:28.7^{\circ}C$, $T_i:26.1^{\circ}C$, R.H.:60%
Test Lab:
Operator:

Test Device: CMS-2S (Plus)
Test Time: 2024-08-21 09:59:27
Inspector:

Model placed on the Union market from 13/03/2025



EPREL registration number: 2315079

<https://eprel.ec.europa.eu/qr/2315079>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark